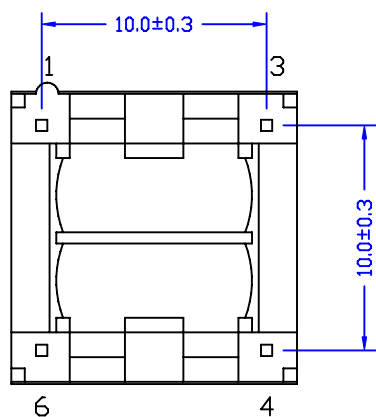
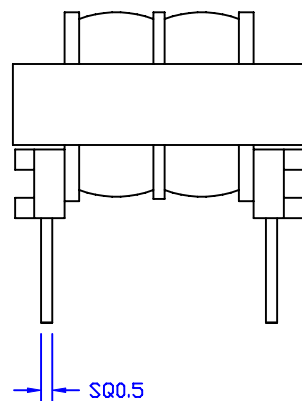
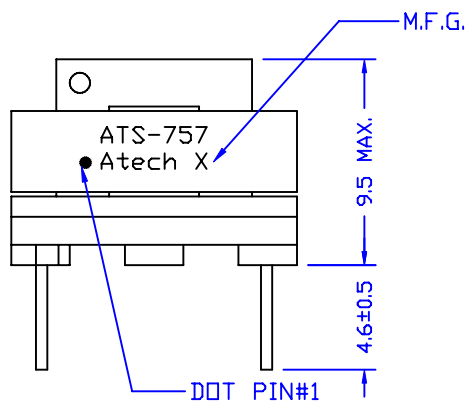
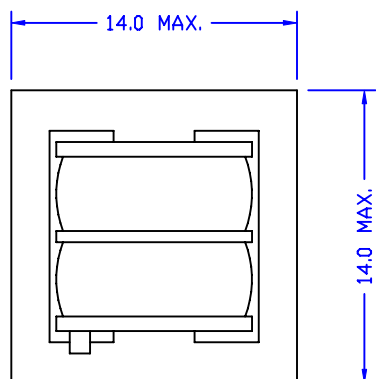


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 1.35 OHM $\pm$ 10%
PIN 4-6 = 1.35 OHM $\pm$ 10%
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-3 = 1.27mH $\pm$ 5%
PIN 4-6 = 1.27mH $\pm$ 5%
PIN 1-6 (3-4 SHORT, W/H 80mA) = 4.57mH MIN.
- TURN RATIO (@260KHz, 0.1Vrms) :
PIN 1-3 : 4-6 = 1 $\pm$ 2%
- HI-POT (@500VAC, 1mA, 2SEC) : PRI-SEC

						Atech®		TITLE
						Atech Technology Co., Ltd.		INDUCTOR
						TEL:022794-6667 FAX:022794-8004		DWG. NO.
A	SPEC.	08/29/2005	BART	MICHAEL	SUEDY	UNITS:		ATS-757
	RELEASE	05/25/2005	BART	MICHAEL	SUEDY	M/M		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						05/25/05	CTAH13012A	Pair