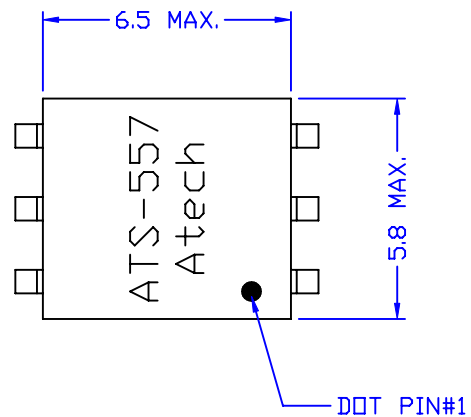


ELECTRICAL CHARACTERISTICS : <FOR UTB00289 COMPATIBLE>

1. DCR : PIN 1-3 = 4-6 = 0.7 OHM MAX.
2. INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-3 = 5uH ± 5%
PIN 4-6 = 5uH ± 8%
3. TURN RATIO (@2.6MHZ, 1Vrms) : PIN 1-3 : PIN 4-6 = 1 ± 8%
4. HI-POT (@600VDC, 0.5mA, 1SEC) : PIN 1-6

					Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004	TITLE INDUCTOR		
B	BOBBIN	12/20/2001	DOLLY	JEFF		SUEDY	DWG. NO. ATS-557	
A	DCR	11/27/2001	DOLLY	JEFF		SUEDY		
	RELEASE	11/14/2001	DOLLY	JEFF		SUEDY		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
						DATE 11/14/01	P/N: CTK005002A	DRAW <i>Pair</i>
REVISIONS								