


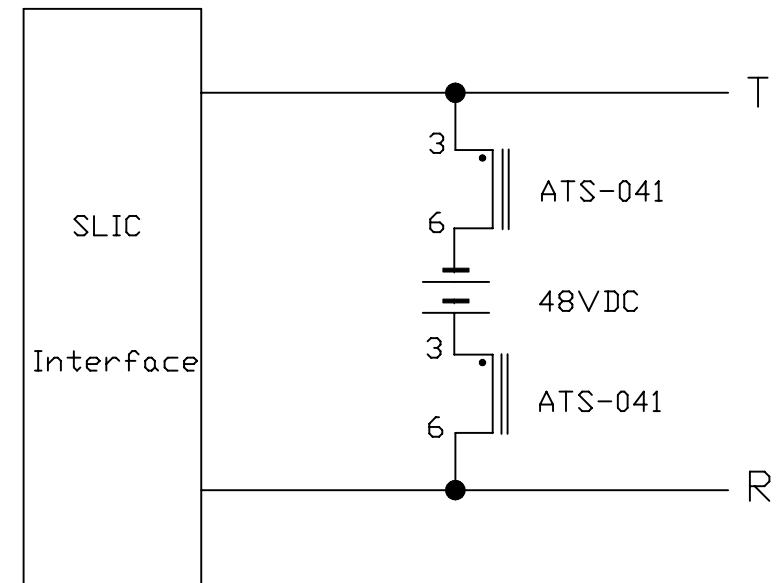

- ```

1 D.C.R. : PIN 3-6 = 220 OHM MAX.
2 INDUCTANCE(1KHZ,1Vrms)
 W/H 60mADC PIN 3-6 = 6H MIN
 W/H 80mADC PIN 3-6 = 5H MIN
3 HI-POT(@1500V AC, 1mA, 1min) 3-CORE

```

|           |             |      |      |     |       |                                                                                                                                                                       |                         |             |
|-----------|-------------|------|------|-----|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------|
|           |             |      |      |     |       | <br><b>Atech Technology Co., Ltd.</b><br>TEL: (02) 2794-6867 FAX: (02) 2794-8004 | TITLE SLIC HOLDING COIL |             |
| A         | APPLICATION |      |      |     |       |                                                                                                                                                                       | DWG. NO.<br>ATS-041     |             |
|           | RELEASE     |      | PAIR |     | SUEDY | UNITS:                                                                                                                                                                | SAFETY                  |             |
| NO:       | DESCRIPTION | DATE | BY   | CHK | APPD  | M/M                                                                                                                                                                   | SHEET 1 OF 1            |             |
| REVISIONS |             |      |      |     |       | DATE                                                                                                                                                                  | P/N                     | DRAW        |
|           |             |      |      |     |       | 05/19/94                                                                                                                                                              | CTK241001A              | <i>Pair</i> |