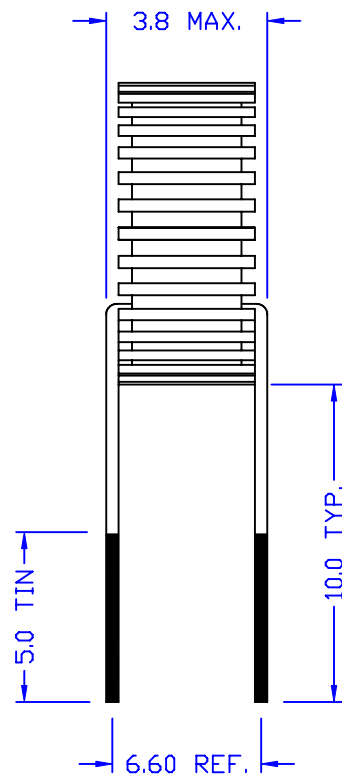
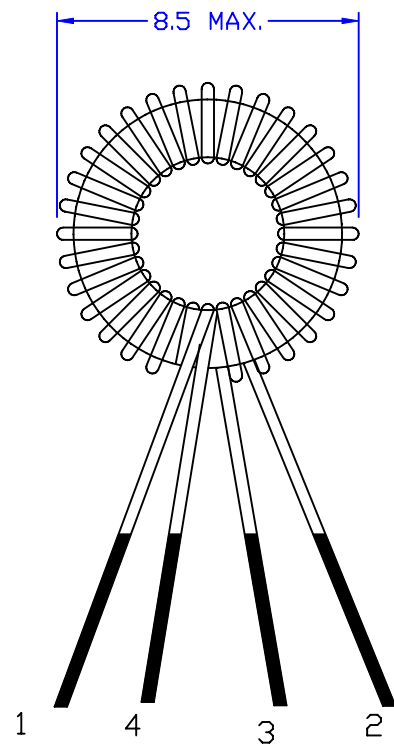


ELECTTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 2-4 = 200 mOHM MAX.
2. INDUCTANCE(@10KHZ, 0.1 Vrms) : PIN 1-3 = 2-4 = 1.3 mH $\pm$ 10%
3. TURN RATIO (@500KHZ, 0.1Vrms) : PIN 1-3 = PIN 4-2 = 1 $\pm$ 1%
4. HI-POT (@500VDC , 1mA, 2SEC) : PRI - SEC
5. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE	TRANSFORMER
B	L TOLERANCE	03/24/2008	PAIR	MICHAEL	EUGENE		DWG. NO.	ATS-805R
A	SPRC.	11/28/2007	PAIR	MICHAEL	EUGENE			
	RELEASE	05/29/2006	PAIR	MICHAEL	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	P/N:	DRAW
						05/29/06	CTKG06003A	Pair