

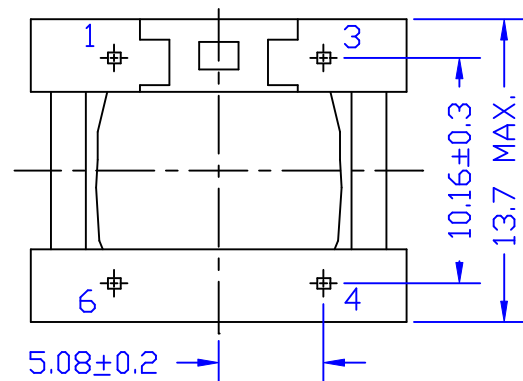


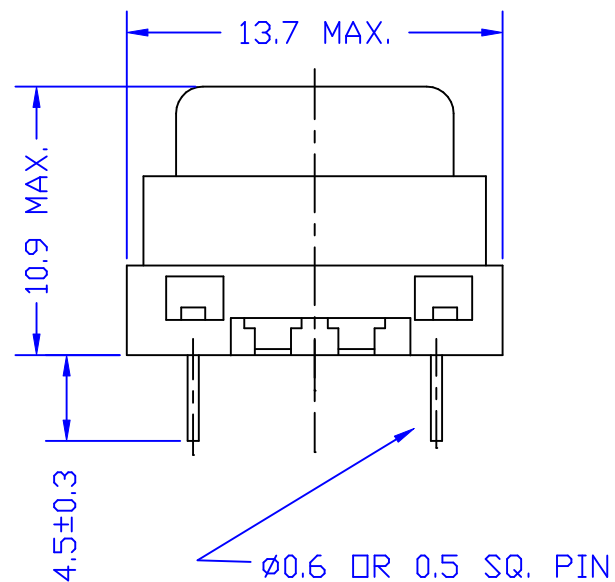

BOTTOM VIEW

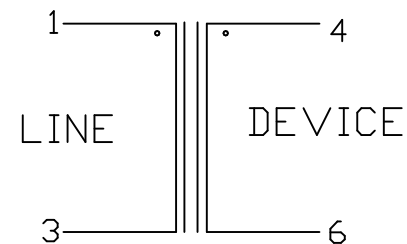

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 53 Ω HM $\pm$ 15%
PIN 4-6 = 38 Ω HM $\pm$ 15%
- INDUCTANCE (@300HZ, 1Vrms) : PIN 1-3 = 0.9H MIN.
- IMPEDANCE (@300HZ, 1Vrms 4-6 W/H 300 Ω HM LOAD) :
PIN 1-3 = 600 Ω HM $\pm$ 10%
- INSERTION LOSS (@1KHZ, 1Vrms 4-6 W/H 300 Ω HM LOAD) :
PIN 1-3 = 1.4dB MAX.
- RETURN LOSS (REF 600 Ω HM 4-6 W/H 300 Ω HM LOAD) :
@300HZ = 17dB MIN.
@1KHZ = 20dB MIN.
@4KHZ = 20dB MIN.
- FREQ RESP. (REF 1KHZ) : @300HZ = $\pm$ 0.45
@4KHZ = $\pm$ 0.35
- HI-POT (@4KVAC, 1mA, 2SEC) : PIN 1-4
- RoHS COMPLIANCE

						Atech®		TITLE	TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.	ATS-070R
						TEL: (02) 2794-6667 FAX: (02) 2794-8004			
RELEASE		03/15/2006	PAIR	AL	EUGENE	UNITS:	SAFETY		SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE	03/15/06		DRAW
									Pair