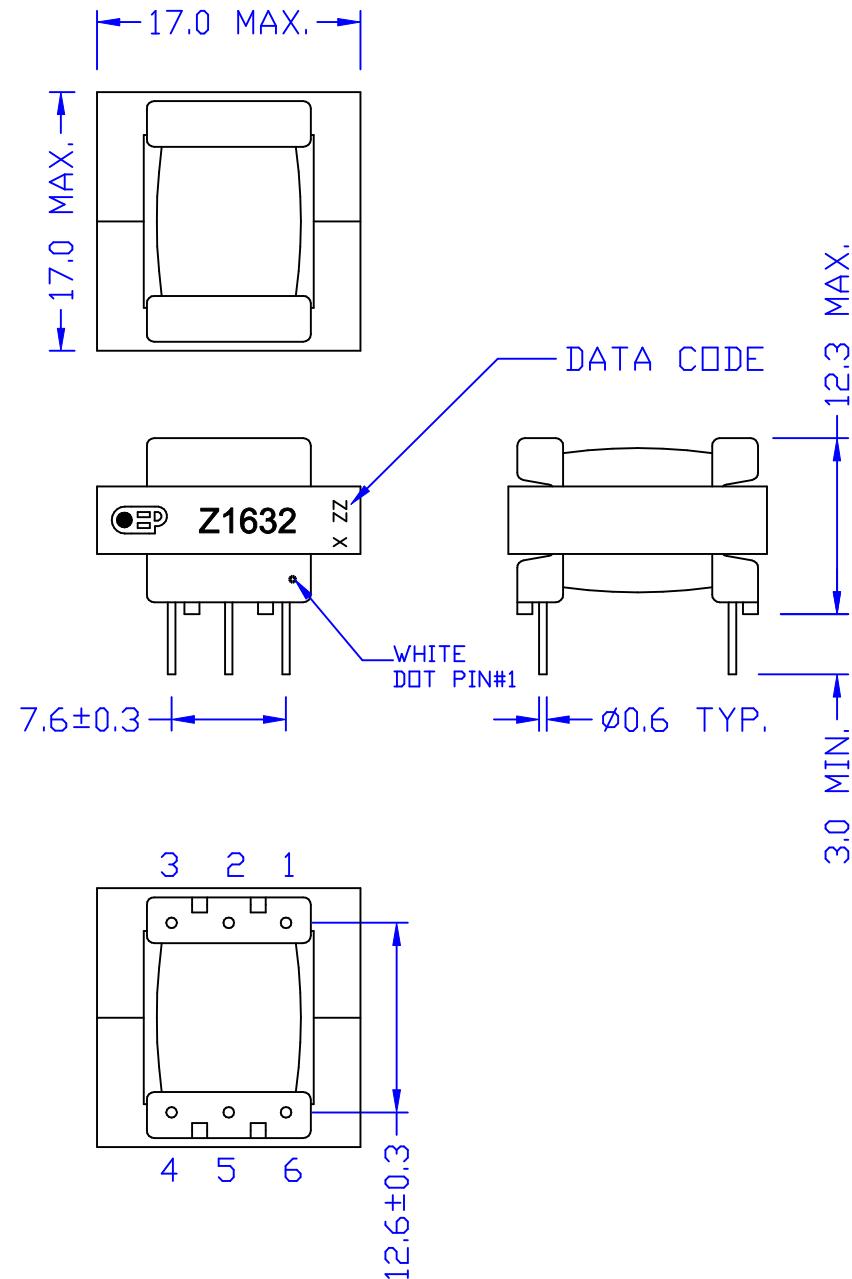


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 17 Ω HM MAX.
PIN 4-6 = 21 Ω HM MAX..
- INDUCTANCE (@1KHZ, 0.27Vrms) :
PIN 1-3 = 250 mH $\pm$ 15%.
PIN 4-6 = 250 mH $\pm$ 15%.
- IMPEDANCE (@1KHz, 1Vrms, W/H 300 Ω HM LOAD) :
300 Ω HM TYP.
- TURN RATIO (@20KHz, 1Vrms) :
PIN 1-3:6-4 = 1 $\pm$ 1%.
- HI-POT (@600DC, 1mA 1 MIN.) :
PRI-SEC
- RoHS COMPLIANCE.

Note : Do not pass DC current through windings.

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE TRANSFORMER
B	HI-POT	03/06/2006	PAIR	AL	ENGINE		DWG. NO. Z1632R
A	ADD Note	12/14/2005	BART	VINCENT	SUEDY		
	RELEASE	12/02/2005	BART	VINCENT	SUEDY	UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 12/02/05	SHEET 1 OF 1 DRAW <i>Pair</i>
REVISIONS							