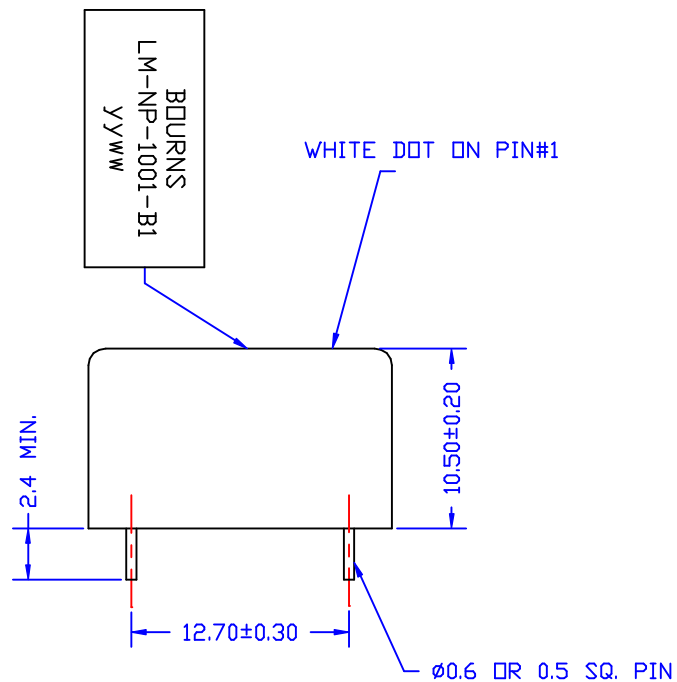
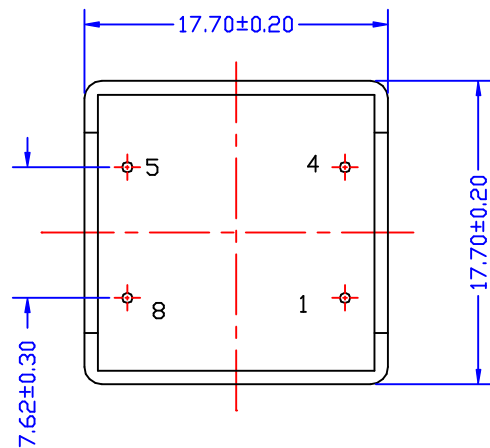


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 66 OHM $\pm$ 10%
PIN 5-8 = 66 OHM $\pm$ 10%
- PARALLEL INDUCTANCE : (<@200HZ, 1Vrms> PIN 1-4 = 5-8 = 2.8H MIN.
- IMPEDANCE : (<@1KHZ, 1Vrms, W/H 600 OHM LOAD> = 600 OHM $\pm$ 22%
- INSERTION LOSS : (<@2KHZ, 1Vrms, W/H 600 OHM LOAD> = 1.5dB MAX.
- FREQ. RESP. : (<REF. 1KHZ> @200HZ = -0.3dB MAX.
@4KHZ = -0.3dB MAX.
@10KHZ = -2.0dB MAX.
- RETURN LOSS : (<REF. 600 OHM> @200HZ = 18dB MIN.
@1KHZ = 18dB MIN.
@4KHZ = 12dB MIN.
- TURN RATIO : (<@10KHZ, 1Vrms> PIN 1-4 : PIN 8-5 = 1 $\pm$ 1%
- LONGITUDINAL BALANCE : @300HZ - 4KHZ = 80dB MIN.
- T.H.D. : (<@1KHZ, 0dBm> = 0.1% MAX.
- HI-POT : (<@4KVAC, 1mA, 1MINUTE> PRI-SEC.

C	PHASE	01/03/2005	BART	MICHAEL	SUEDY	Atech® Atech Technology Co., Ltd. TEL:02/2794-6667 FAX:02/2794-8004	TITLE	600 : 600 TRANSFORMER
B	IMPEDANCE	06/24/2003	RORY	AL	SUEDY		DWG. NO.	LM-NP-1001-B1
A	ADD DATECODE	06/07/2003	RORY	AL	SUEDY			
	RELEASE	11/14/2002	DOLLY	SUEDY	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW
REVISIONS						11/14/02		Pair