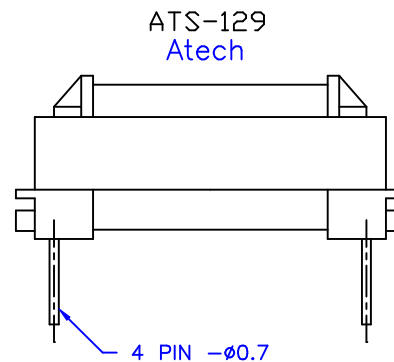
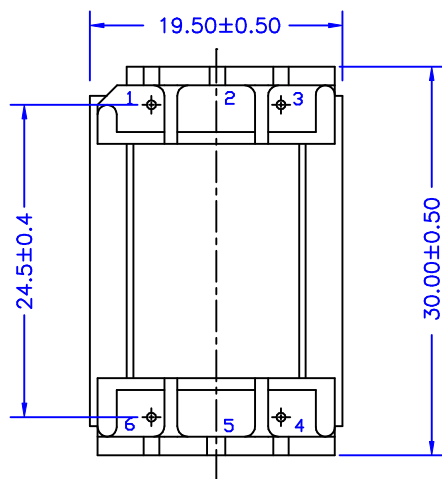
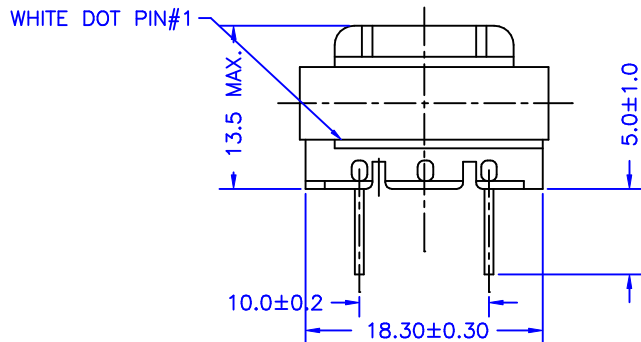


ELECTRICAL CHARACTERISTICS: (671-8273 COMPATIBLE)

- 1 D.C.R. : PIN 1-3 = 80 OHM $\pm$ 15%
PIN 4-6 = 100 OHM $\pm$ 15%
- 2 INDUCTANCE : (AT 300HZ, 1Vrms) PIN 1-3 = 370mH MIN.(W/H 70mADC)
- 3 IMPEDANCE(@ 4KHZ, 1Vrms, W/H 70mADC, PIN 4-6 W/H 464 OHM)
= 600 OHM $\pm$ 2%
- 4 INSERTION LOSS = 1.9dB MAX.(AT 1KHZ, 1Vrms)
- 5 FREQ. RESP. (REF. TO 1KHZ)@300HZ= $\pm$ 1dB,@4KHZ= $\pm$ 0.2dB
- 6 RETURN LOSS : (REF. 600 OHM) @300HZ = 8dB MIN.
@1KHZ = 15dB MIN.
@4KHZ = 15dB MIN.
- 7 LOGITUDINAL BALANCE = 70dB MIN.(AT 1KHZ)
LOGITUDINAL BALANCE = 60dB MIN. (AT 4KHZ)
- 8 THD :(@300HZ, -10dBm,70mADC) = -76dB MAX.
- 9 HI-POT = 1500VAC, 1mA, 2SEC (PRI-SEC)
10. RoHS COMPLIANCE

						Atech[®] Atech Technology Co., Ltd. TEL: (02)2794-6667 FAX: (02)2794-8004		TITLE 600 : 464 TRANSFORMER	
								DWG. NO. ATS-129R	
	RELEASE	/03/30 /2006	PAIR		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW	
REVISIONS						03/30/06	CTP019002A	<i>Pair</i>	