

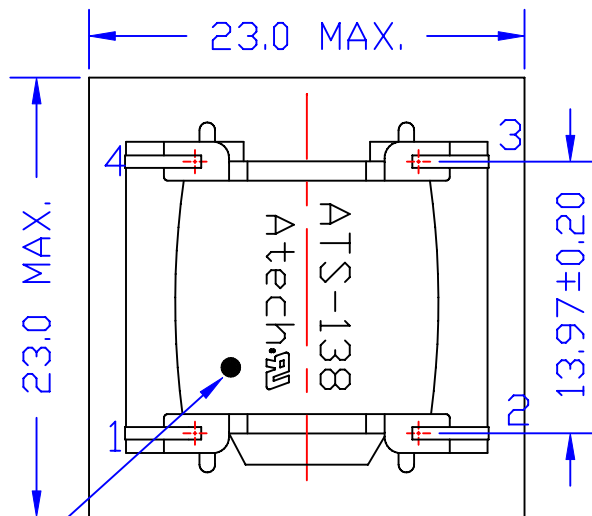
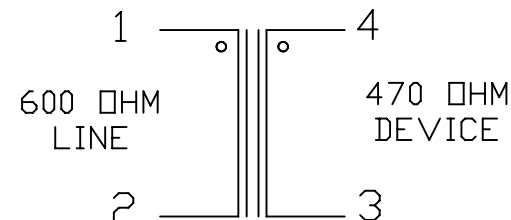


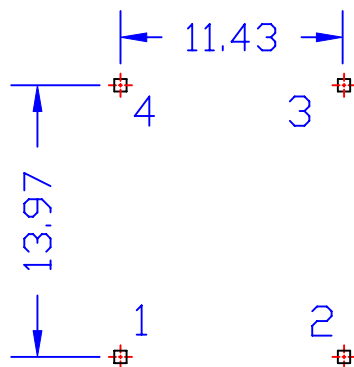

BLACK DOT PIN#1

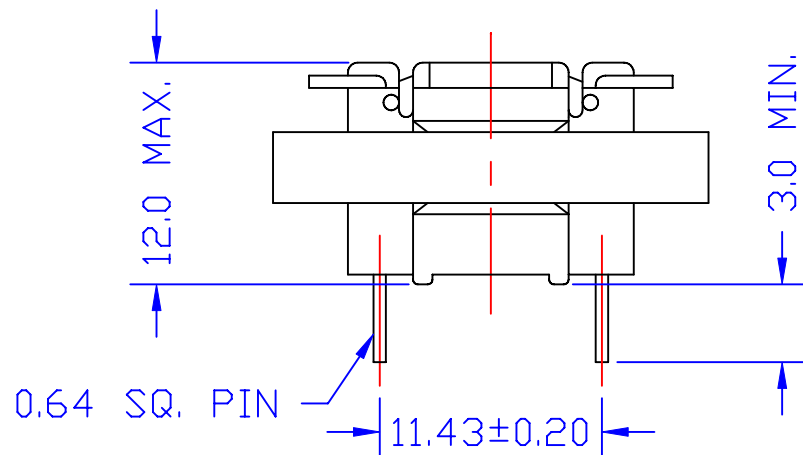

ELECTRICAL CHARACTERISTICS: (FOR 9624, 671-8005, 671-8015 COMPATIBLE)

1. D.C.R. : PIN 1-2 = 108 OHM+/-10% PIN 3-4 = 120 OHM+/-10%
2. INDUCTANCE (@300HZ, 1Vrms, W/H 80mADC): PIN 1-2 = 235mH MIN.
3. RETURN LOSS : (REF. 600 OHM) @ 300HZ = 7.5dB MIN.
@ 1KHZ = 12dB MIN.
@ 4KHZ = 12dB MIN.
4. INSERTION LOSS : (@1KHZ, 0dBm, W/H 80mADC) 2.0+/-0.5dB
5. FREQ. RESPONSE : (REF. 1KHZ) @ 300HZ = +/-2.0dB
@ 4KHZ = +/-0.5dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 65dB MIN.
7. TURN RATIO : (15KHZ, 0.1Vrms) PIN 1-2 : 4-3 = 1+/-1%
8. HI-POT : (@1250VAC, 1mA, 2 SEC.) PIN 1-4
9. RoHS COMPLIANCE.

						Atech®		TITLE 600: 470 TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO. ATS-138R
A ADD UL MARK		06/27/2008	Pair	Willie	Eugene	UNITS: M/M		SHEET 1 OF 1
RELEASE		01/18/2006	BART		SUEDY	SAFETY		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTP022003A	DRAW Pair
REVISIONS						01/18/06		