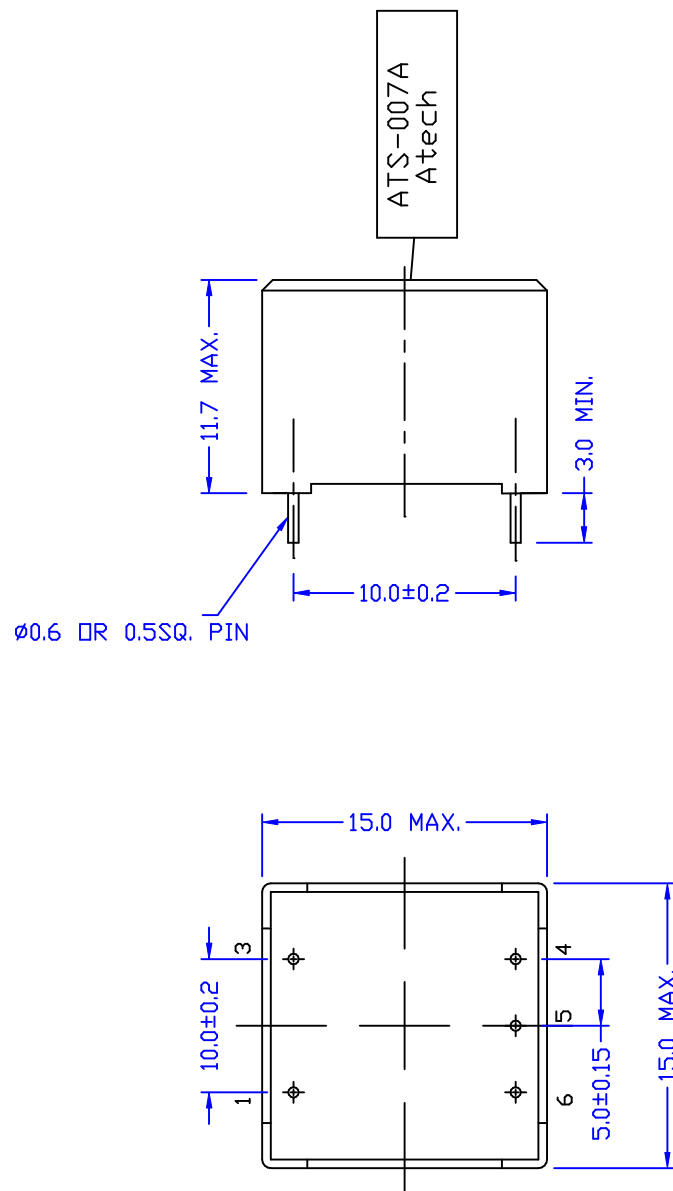


ELECTRICAL CHARACTERISTICS : <671-8240 COMPATIBLE>

- DCR : PIN 1-3 = 55 OHM $\pm$ 15%
PIN 4-6 = 65 OHM $\pm$ 15%
- INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-3 = 600mH MIN.
- Q (@1KHZ, 1Vrms) : PIN 1-3 = 1.1 MIN.
- IMPEDANCE = 600 OHM $\pm$ 15%
- INSERTION LOSS = 1.3db MAX. (AT 1KHZ, 1V)
- FREQ. RESP = $\pm$ 0.5db (REF. TO 1KHZ) AT 300HZ TO 4KHZ
- RETURN LOSS = @300HZ = 18db MIN.
@1KHZ = 21db MIN.
@3.4KHZ = 20db MIN.
- TURN RATIO = 1 : 1 $\pm$ 1%
- POLARITY = PIN 1-4 INPHASE
- LONGITUDINAL BAL. = 60dB MIN. AT 200HZ TO 4KHZ
- LEVEL TRACKING (@300HZ, 4Vrms, 4-6 W/H 600 OHM LOAD)
PIN 1-3 = 400 OHM MIN.
- HI-POT = 3750VAC, 1MINUTE (PRI.-SEC. ONLY)
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE 600 : 600 TRANSFORMER	
								DWG. NO. ATS-007AR	
	RELEASE	10/18/2005	BAR	LYS	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTP028006A	DRAW	<i>Pair</i>
REVISIONS						10/18/05			