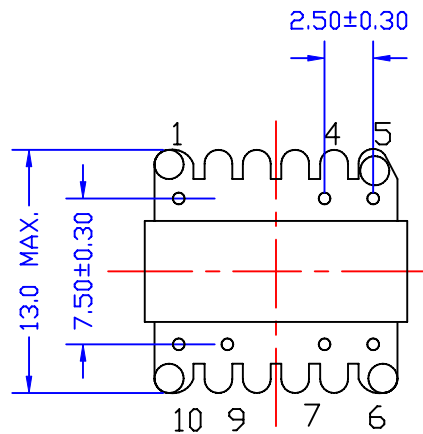
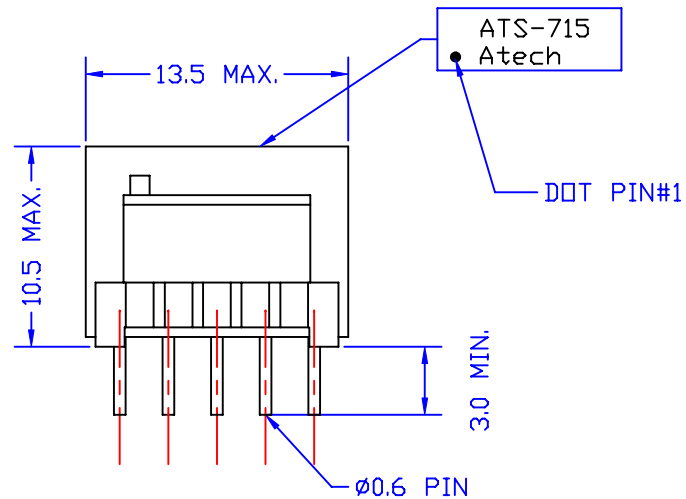


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-5 = 50 OHM $\pm 20\%$.
PIN 6-10 = 38 OHM $\pm 20\%$.
- INDUCTANCE (@1KHZ, 0.25 Vrms) :
PIN 1-5 = 316 mH $\pm 25\%$.
PIN 6-10 = 316 mH $\pm 25\%$.
- IMPEDANCE (@1KHZ, 0.25 Vrms, 6-10 W/H 600 OHM LOAD) :
PIN 1-5 = 600 OHM $\pm 20\%$.
- TURN RATIO (@1KHZ, 0.25Vrms) :
PIN 1-5:6-10 = 1 $\pm 1\%$.
- HI-POT (@250VAC, 5mA, 1MIN) :
PRI-SEC.
PRI-CORE.
SEC-CORE.
- RoHS COMPLIANCE.

B PIN#1 DOT		11/21/2006	PAIR	MICHAEL	EUGENE	Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE 600: 600 TRANSFORMER	
A ERASE PIN 2,3		10/28/2005	BART	MICHAEL	SUEDY		DWG. NO. ATS-715R	
RELEASE		10/26/2005	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTP213000A	SHEET 1 OF 1
REVISIONS						10/26/05	DRAW Pair	