
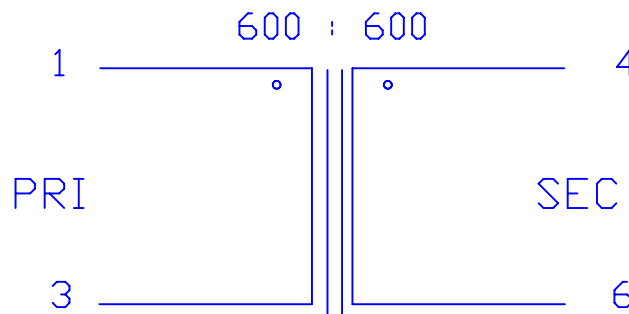


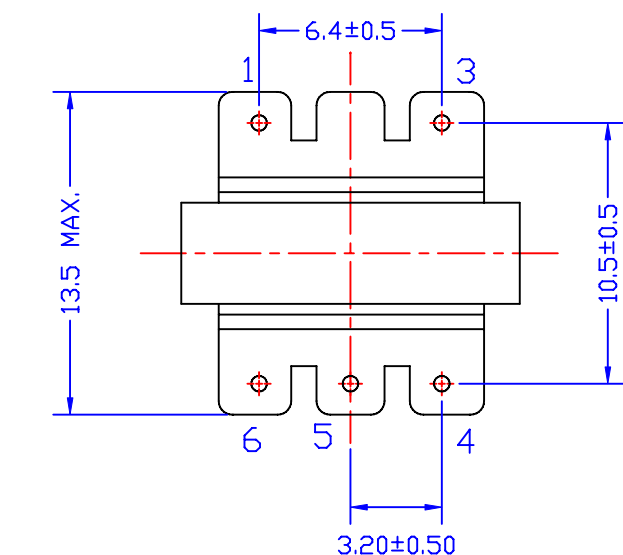

1. D.C.R. : PIN 1-3 =55 Ω M MAX., PIN 4-6 =70 Ω M MAX.
2. INDUCTANCE (@1KHZ, 0.25Vrms SERIES) : PIN 1-3 = 130mH MIN.
PIN 4-6 = 130mH MIN.
3. IMPEDANCE (@1KHZ, 0.25Vrms)
PIN 1-3 = 600 Ω M+/-10%(4-6 600 Ω M LOAD)
4. TURNS RATIO (@10KHZ, 0.25Vrms) : PIN 1-3 : 4-6 = 1+/-2%
5. HI-POT(700VAC, 3mA, 1MINUTE) : PRI-SEC , COIL-CORE
6. RoHS COMPLIANT

C	D.C.R	10/23/2007	PAIR	MICHAEL	EUGENE	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6867 FAX:(02)2794-8004	TITLE 600 : 600 TRANSFORMER	
B	T/R TOLERANCE	07/20/2007	PAIR	MICHAEL	EUGENE		DWG. NO.	
A	SPEC.	05/29/2007	PAIR	MICHAEL	EUGENE		ATS-849R	
	RELEASE	05/02/2007	PAIR		SUEDY			
NO:	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
						DATE 05/02/07	P/N: CTP214005A	DRAW <i>Pair</i>