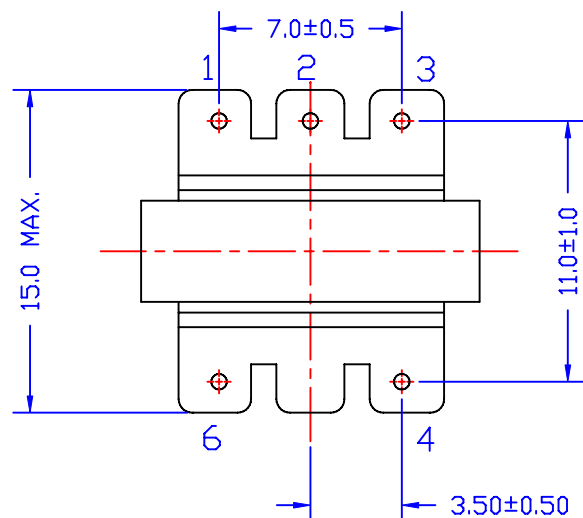
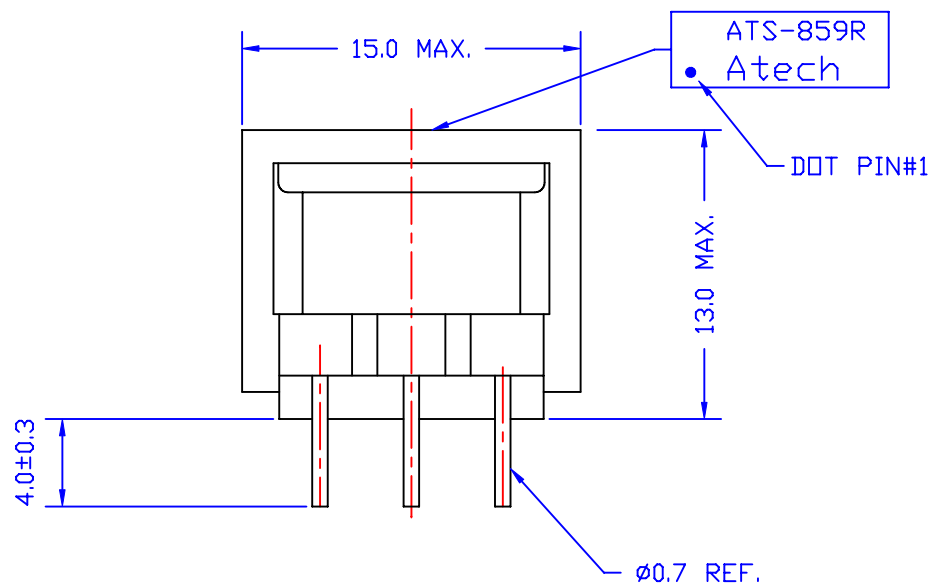


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-2 = 2-3 = 22.4 Ω M $\pm$ 20%
PIN 4-6 = 0.55 Ω M $\pm$ 20%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-2 = 2-3 = 180mH MIN.
PIN 4-6 = 11mH MIN.
3. TURNS RATIO (@100KHZ, 1Vrms) : PIN 1-2 : 2-3 = 1 $\pm$ 1%
PIN 1-2 : 4-6 = 4.22 $\pm$ 1%
4. HI-POT(@1KVAC, 2mA, 1SEC.) : PIN 1-4, 4-CORE (1-6, SHORT)
(@500VDC, 100M Ω M) : PIN 1-6
5. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-859R	
A	PIN 4.0±0.3	07/26/2007	PAIR	VINCENT	EUGENE			
	RELEASE	07/07/2007	PAIR	VINCENT	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						07/04/07	CTP214006A	<i>Pair</i>