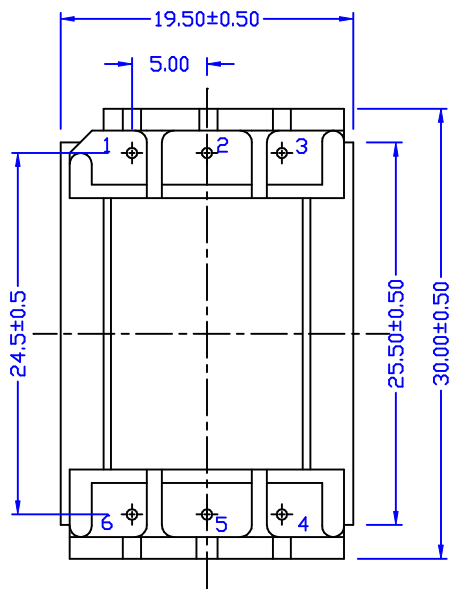
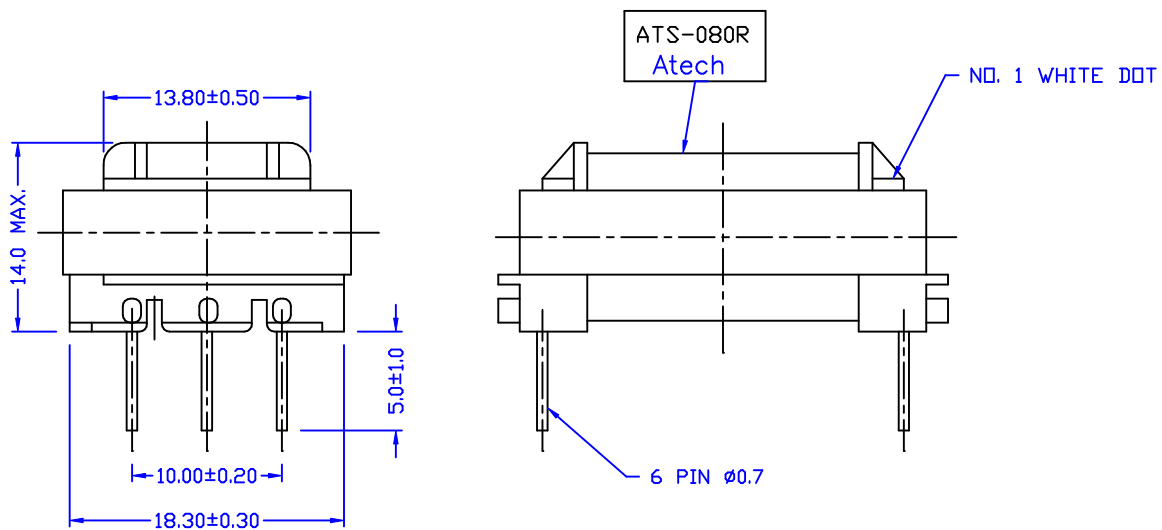


ELECTRICAL CHARACTERISTICS : <671-1561 COMPATIBLE>

- IMPEDANCE : <@1KHZ 1Vrms PIN 2-6 SHORT W/H 90mADC PIN 3-4 W/H 525 OHM LOAD>
PIN 1-5 = 600 OHM $\pm$ 10%
- D.C.R. : PIN 1-5 <W/H PIN 2-6 SHORT> = 75 OHM $\pm$ 15%
PIN 3-4 = 100 OHM $\pm$ 15%
- INSERTION LOSS <@1KZ 1Vrms PIN 2-6 SHORT W/H 90mADC PIN 3-4 W/H 525 OHM LOAD>
PIN 1-5 = 1.6 dB MAX.
- FREQ. RESP. <REF. 1KHZ> : @300HZ = $\pm$ 1.8dB
@600HZ = $\pm$ 0.5dB
@4KHZ = $\pm$ 0.3dB
- RETURN LOSS <REF. 600 OHM> : @300HZ = 7.5dB MIN.
@1KHZ = 15dB MIN.
@4KHZ = 15dB MIN.
- LOGITUDINAL BALANCE : @300-1KHZ = 70dB MIN.
@1K-4KHZ = 60dB MIN.
- HI-POT <@1500VAC, 60HZ, 1mA, 1MINUTE> : PRI-SEC
- RoHS COMPLIANT

						Atech®		TITLE	TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.	ATS-080R
						TEL:0212794-6667 FAX:0212794-8004			
RELEASE		05/12/2006	PAIR	WILLIE	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1	
DESCRIPTION		DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE	P/N:	DRAW	
						05/12/06	CTP21900LA	Pair	