
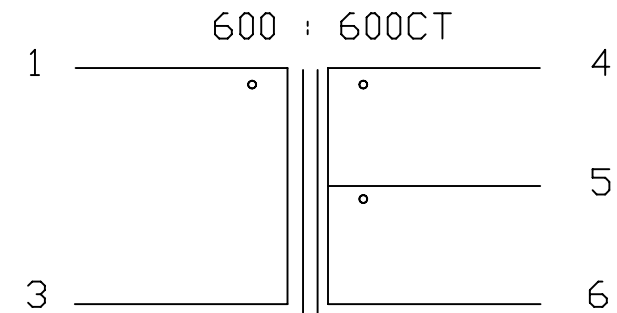
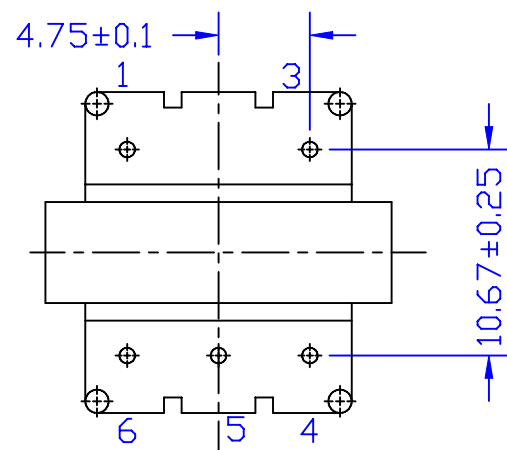


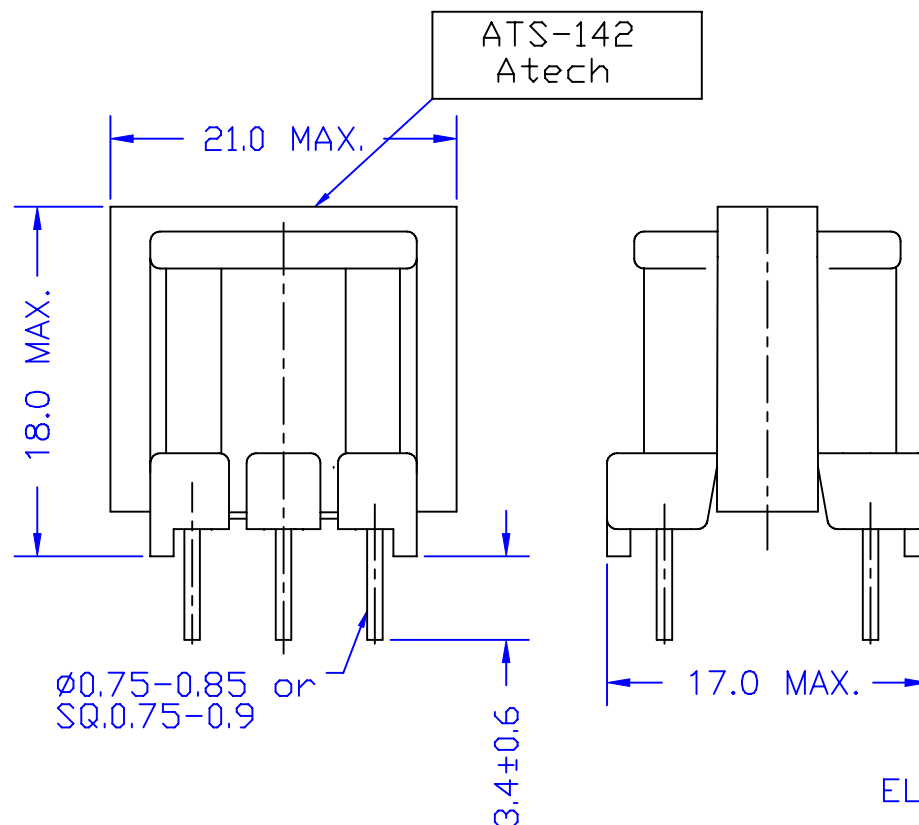

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 65 Ω M $\pm$ 10% , PIN 4-6 = 110 Ω M $\pm$ 10%
2. PARALLEL INDUCTANCE (@300HZ, 1Vrms) : PIN 1-3 = 200mH MIN.
3. IMPEDANCE (@1KHZ, 0dBm, 90mADC, 4-6 W/H 600 Ω M)
PIN 1-3 = 600 Ω M $\pm$ 10%
5. FREQ. RESP.(REF. 1KHZ) : @300HZ = $\pm$ 3dB
@4KHZ = $\pm$ 1dB
4. INSERTION LOSS (@1KHZ, 0dBm, 90mADC, 4-6 W/H 600 Ω M) : 2.3dB MAX.
6. RETURN LOSS (REF. 600 Ω M) : @300HZ = 5dB MIN.
@1KHZ = 10dB MIN. @4KHZ = 12dB MIN.
7. TURNS RATIO (@5KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 $\pm$ 1%
8. HI-POT (@1500VAC, 1mA, 1MINUTE) : PIN 1-4
9. RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 600 : 600CT TRANSFORMER	
								DWG. NO. ATS-142R	
	RELEASE	12/16/2005	PAIR	EUGENE	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	CTP21900MA	DRAW <i>Pair</i>
REVISIONS						12/16/05			