
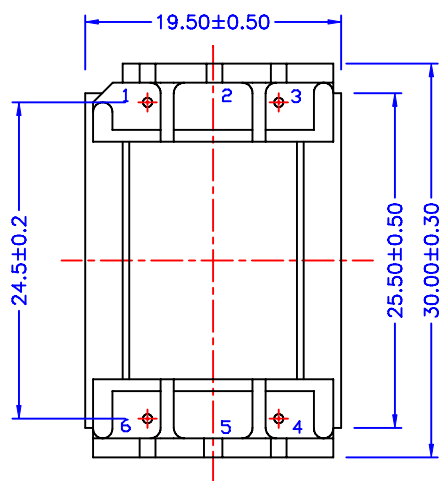
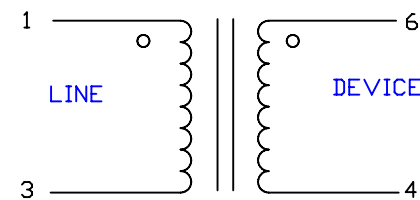
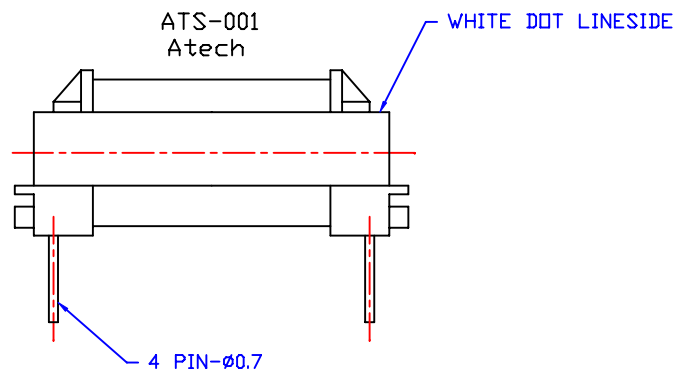


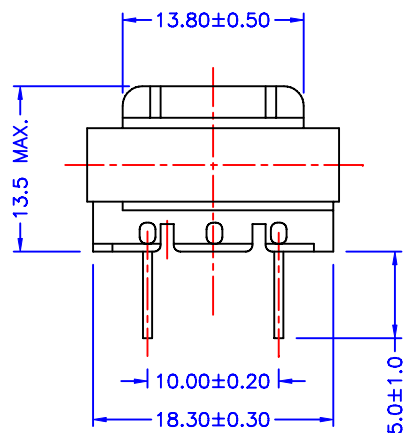

ELECTRICAL CHARACTERISTICS :

- 1 D.C.R. : PIN 1-3 = 78 Ω HM $\pm$ 15%
PIN 4-6 = 105 Ω HM $\pm$ 15%
- 2 INDUCTANCE : (AT 1KHZ, 1Vrms) PIN 1-3 = 400mH MIN. (W/O DC)
PIN 1-3 = 200mH MIN. (W/H 80mA DC)
- 3 IMPEDANCE = 600 Ω HM $\pm$ 15%
(AT 1KHZ, 1Vrms, 0-80mA DC, PIN 4-6 W/H 600 Ω HM)
- 4 INSERTION LOSS = 1.7db MAX. (AT 1KHZ, 1Vrms, W/H 600 Ω HM LOAD)
- 5 FREQ. RESP. = $\pm$ 0.5db (300HZ -3.4KHZ, REF. TO 1KHZ)
- 6 RETURN LOSS : ERL = 14db MIN.
SRL-LO = 8db MIN.
SRL-HI = 16db MIN.
- 7 LOGITUDINAL BALANCE = 60db MIN. (AT 1KHZ)
LOGITUDINAL BALANCE = 60db MIN. (AT 3.4KHZ)
- 8 HI-POT = 1500VAC, 1mA, 1MINUTE (PRI-SEC-CORE)
9. RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:0212794-6667 FAX:0212794-8004		DWG. NO.
								ATS-001R
RELEASE		09/01/2006	PAIR		EUGENE	UNITS:	SAFETY	
						M/M		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						09/01/06	CTP21900A	Pair