

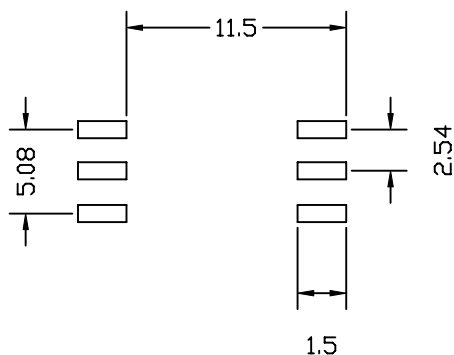
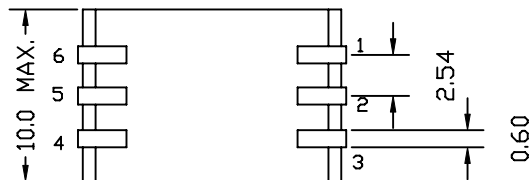


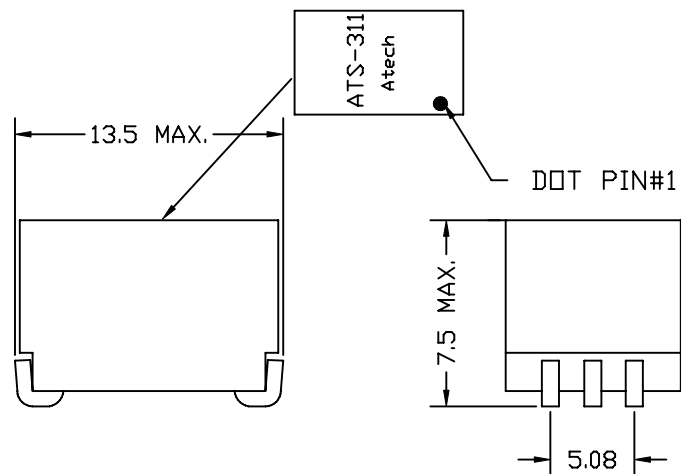

NONE TOLERANCE FOR REFERENCE

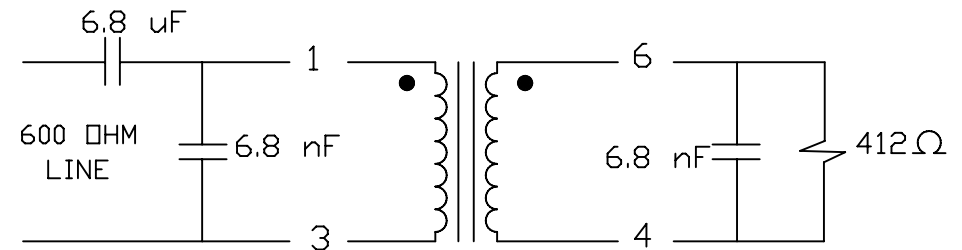

ELECTRICAL CHARACTERISTICS (P2781 COMPATIBLE)

- DCR: 1-3 = 6-4 = 112 OHM $\pm$ 10%
- INDUCTANCE (@1KHZ, 0.1Vrms, PARALLEL)
1-3 = 1.6H MIN.
- INSERTION LOSS (@2KHZ, 1Vrms) : 2dB MAX.
- FREQ. RESPONSE (REF. 2KHZ)
@200HZ = $\pm$ 0.2dB @4KHZ = $\pm$ 0.1dB.
- RETURN LOSS (REF. 600 OHM)
@200HZ = 18dB MIN. @4KHZ = 24dB MIN.
- TURN RATIO (@1KHZ, 1Vrms) 1-3 = 6-4 = 1 $\pm$ 1%
- HI-POT (@3750VAC, 1mA, 2SEC) PRI-SEC.
- WORKING TEMP. : -10°C TO +70°C
- LEAD-FREE

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.
								ATS-311N
A	DELITE MFG	08/18/2006	PAIR		EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	08/02/2004	BART	AL	SUEDY	M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						08/02/04	CTP308002A	Pair