
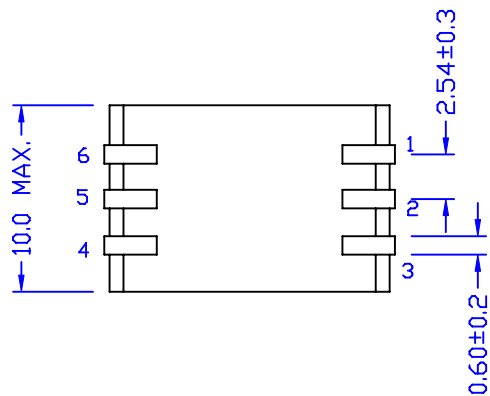
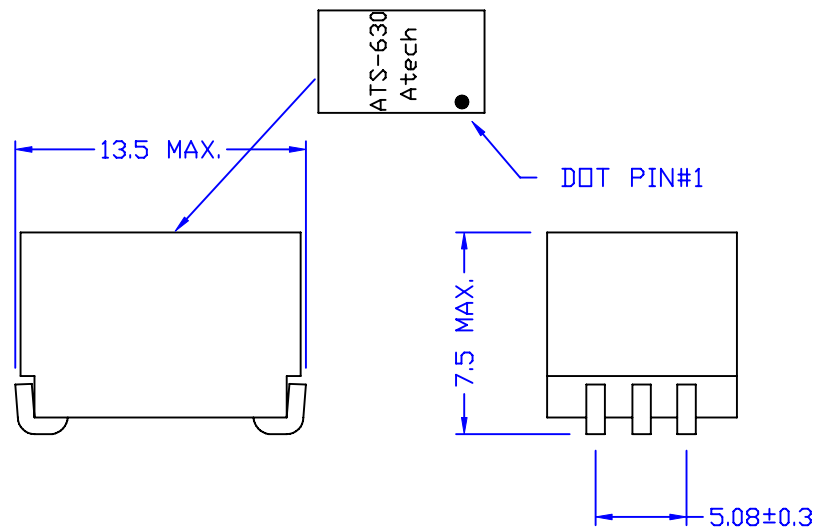


Tolerance: +/- 0.3mm

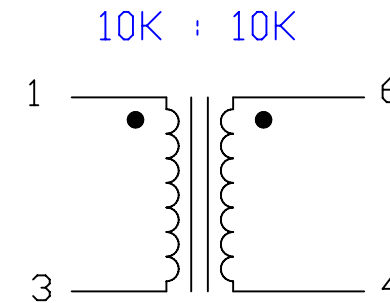

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 4-6 = 1.62 KOHM $\pm$ 15%
- INDUCTANCE PARALLEL (@1KHZ, 0.1Vrms) : PIN 1-3 = 25H MIN.
- INSERTION LOSS (@2KHZ, 1Vrms 4-6 W/H 10KOHM) :
PIN 1-3 = 2dB MAX.
- FREQ. RESP. (@REF 2KHZ) : @200HZ = $\pm$ 0.5dB
@4KHZ = $\pm$ 0.2dB.
- RETURN LOSS (@REF 10KOHM) : @200HZ = 14dB MIN.
@4KHZ = 14dB MIN.
- TURN RATIO (@7.9KHZ, 1Vrms) : PIN 1-3 : PIN 6-4 = 1 $\pm$ 1%
- HI-POT (@3750VAC, 1mA, 2SEC) : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE 10K : 10K TRANSFORMER	
A	LP	10/14/2002	DOLLY	KEVIN	SUEDY		DWG. NO. ATS-630	
	RELEASE	10/04/2002	PAIR	JEFF	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTP30800AA	DRAW <i>Pair</i>
REVISIONS						10/04/02		