
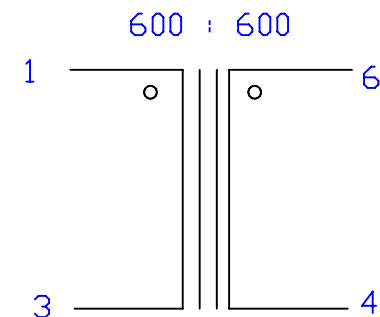


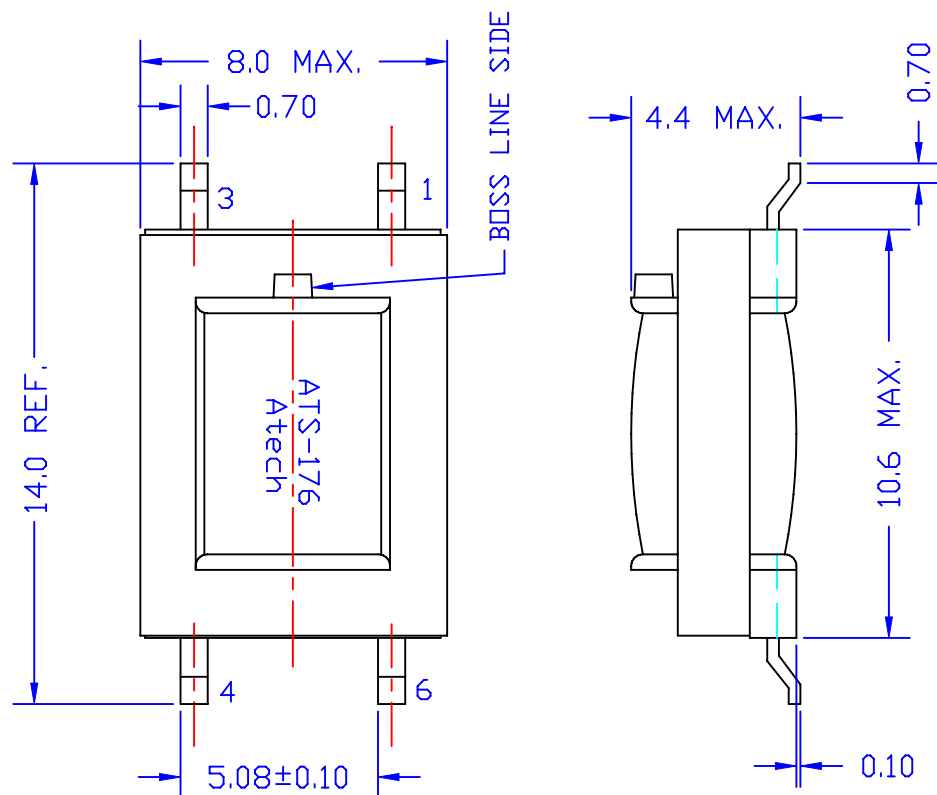

ELECTRICAL CHARACTERISTICS:

1. D.C.R. PIN 1-3 = 48 Ω HM $\pm$ 10% PIN 4-6 = 42 Ω HM $\pm$ 10%
2. INDUCTANCE (@250HZ, 0.5Vrms, PARALLEL) 1-3 = 1.5H MIN.
3. IMPEDANCE (@1KHZ, 0dBm, 4-6 W/H 600 Ω HM LOAD)
1-3 = 600 Ω HM $\pm$ 10%
4. INSERTION LOSS = 1.0 dB MAX.
(AT 1KHZ, 0dBm, W/H 600 Ω HM LOAD)
5. FREQ. RESP. (@ 300HZ TO 4KHZ, REF. 1KHZ) = $\pm$ 0.35dB
6. RETURN LOSS @300HZ = 20dB MIN. @1KHZ = 23dB MIN.
@4KHZ = 23dB MIN.
7. TURN RATIO = 1:1 $\pm$ 1%
8. POLARITY = PIN 1-6 INPHASE
9. LONGITUDINAL BAL. = 70dB MIN. (@ 200HZ TO 4KHZ)
10. HI-POT = 1250 VAC, 1mA, 2SEC. (PRI. -SEC.)
11. ROHS COMPLIANCE

						Atech®		TITLE 600 : 600 TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:(02)2794-6667 FAX:(02)2794-8004		ATS-176R	
A	DELET MFG	10/26 /2006	PAIR	WILLIE	EUGENE	UNITS:		SAFETY	
						M/M		SHEET 1 OF 1	
						DATE		P/N:	
						07/15/05		CTP30800HA	
						REVISIONS		DRAW	
								Pair	