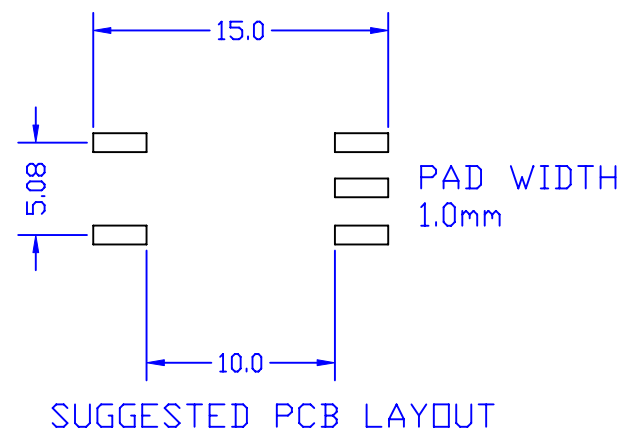
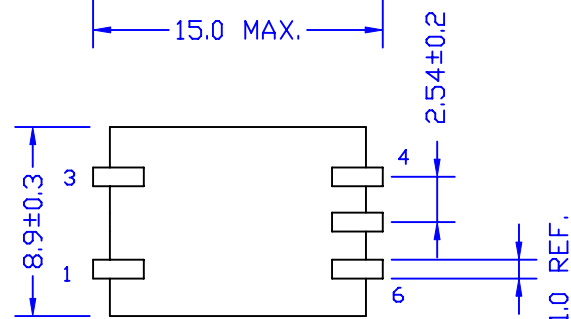
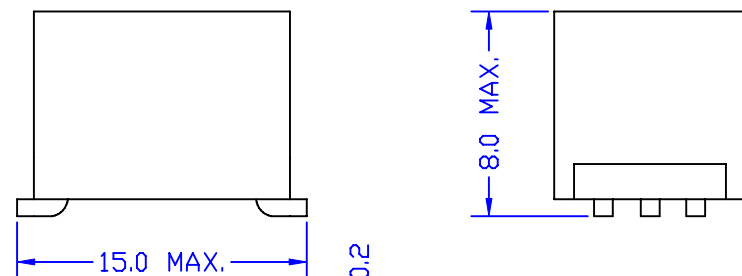
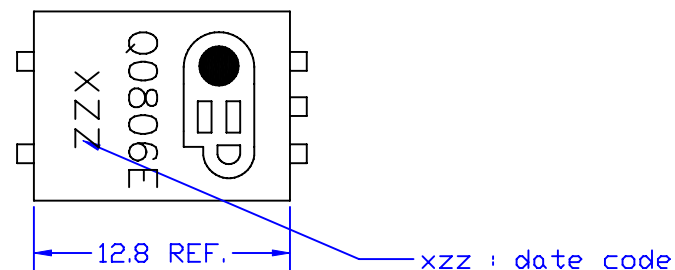


ELECTRICAL CHARACTERISTICS :

- DCR: PIN 1-3 = 272 OHM $\pm$ 15%
PIN 6-4 = 247.4 OHM $\pm$ 15%.
- INDUCTANCE (@100HZ, 0.27Vrms)
25 DEGREE C
PIN 1-3 = 9.6 H NOM.
PIN 4-6 = 8.3 H NOM.
-10 DEGREE C PIN 1-3 PARALLEL, PIN 1-3 SERIES,
PIN 6-4 PARALLEL , PIN 6-4 SERIES
-25 DEGREE C PIN 1-3 PARALLEL, PIN 1-3 SERIES,
PIN 6-4 PARALLEL, PIN 6-4 SERIES
- HI-POT : PRI-SEC, 3KVAC, 1mA, 2SEC.
- RoHS COMPLIANCE.

E	CHANGE CAN	06/20/2007	PAIR	MICHAEL	EUGENE	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 1.1 : 1	TRANSFORMER
D	DIM	12/08/2005	BART	MICHAEL	SUEDY		DWG. NO.	Q0806ER
C	DIM	12/05/2005	BART	MICHAEL	SUEDY			
	RELEASE	01/21/2005	BART	ARRON	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
ND	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						01/21/05		