
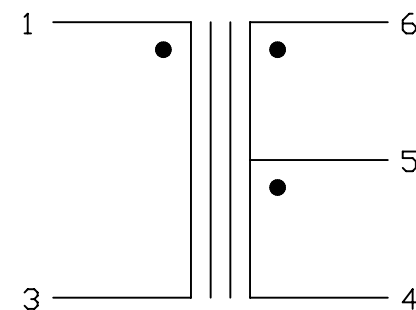
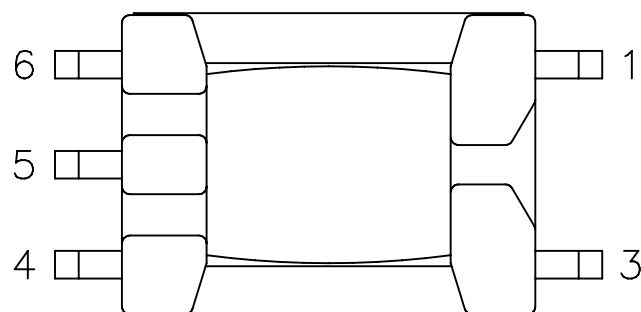


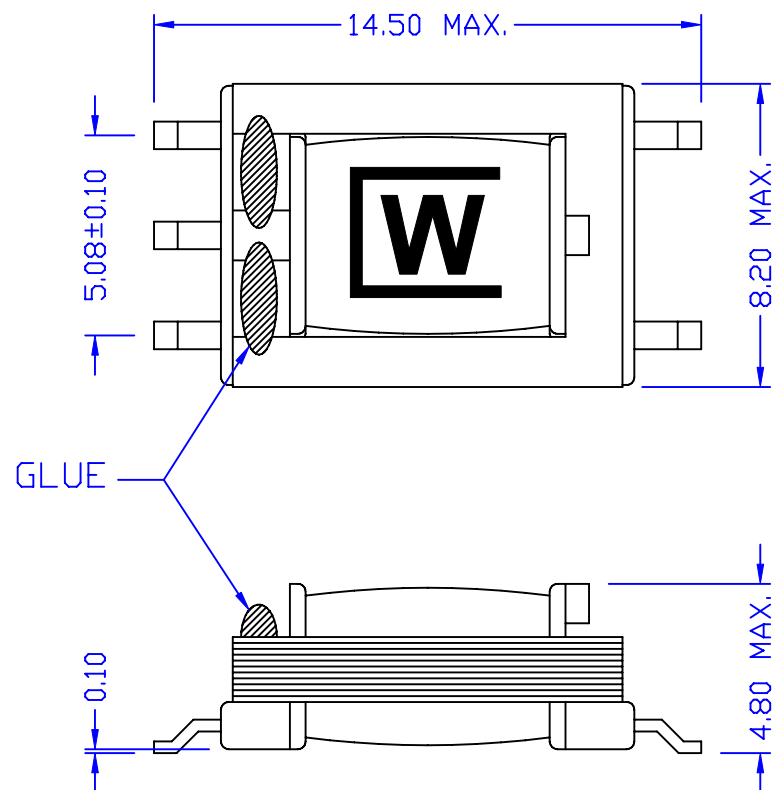

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 138 OHM MAX.
PIN 4-6 = 130 OHM MAX.
- INDUCTANCE PARALLEL (@250HZ, 0.5Vrms) : PIN 1-3 = 2.8H MIN.
- INSERTION LOSS (@1KHZ, 0dB) : 4-6 W/H 365 OHM LOAD = 2.8dB MAX.
- FREQ. RESP. (REF, 1KHZ) : (@300HZ) = ± 0.5 dB
(@4KHZ) = ± 0.5 dB
- RETURN LOSS (REF 600 OHM) : (@300HZ) = 25dB MIN.
(@1KHZ) = 30dB MIN.
(@4KHZ) = 30dB MIN.
- TURN RATIO (@20KHZ, 1Vrms) : PIN 1-3 : PIN 6-4 = $1 \pm 1\%$
- HI-POT (@1KVAC, 1mA, 2SEC) : PIN 1-6
- W** MARKING FOR RoHS

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE TRANSFORMER
B	RoHS COMPLIANT	08/08/2006	PAIR	SAN	EUGENE		DWG. NO. ATC-02-050A
A	MARKING	07/24/2006	PAIR		EUGENE		
	RELEASE	04/09/2004	PAIR	SUEDY	SUEDY	UNITS: M/M	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 04/09/04	P/N: CTP308016A DRAW Pair
REVISIONS							