
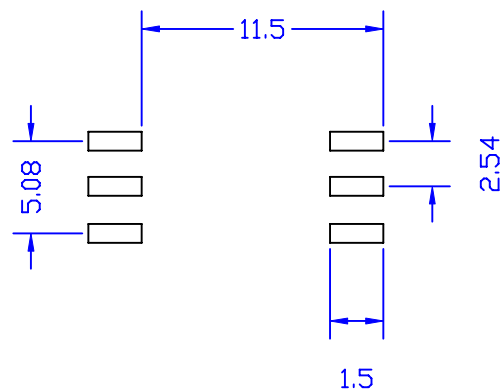
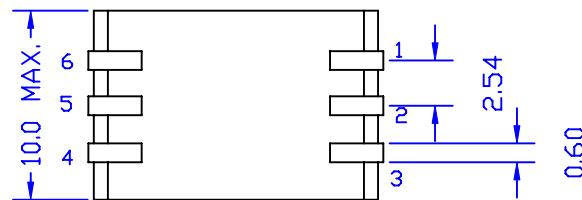
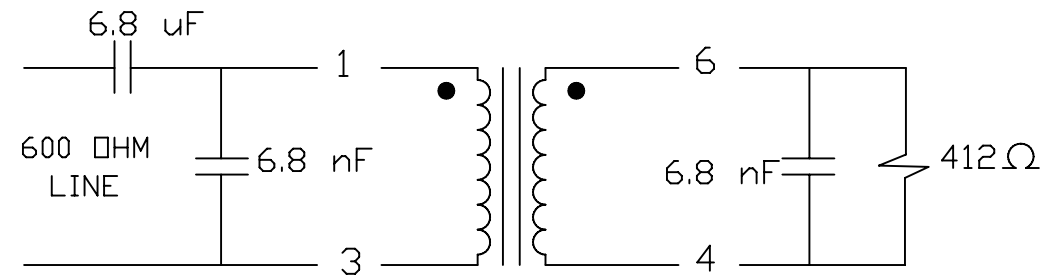


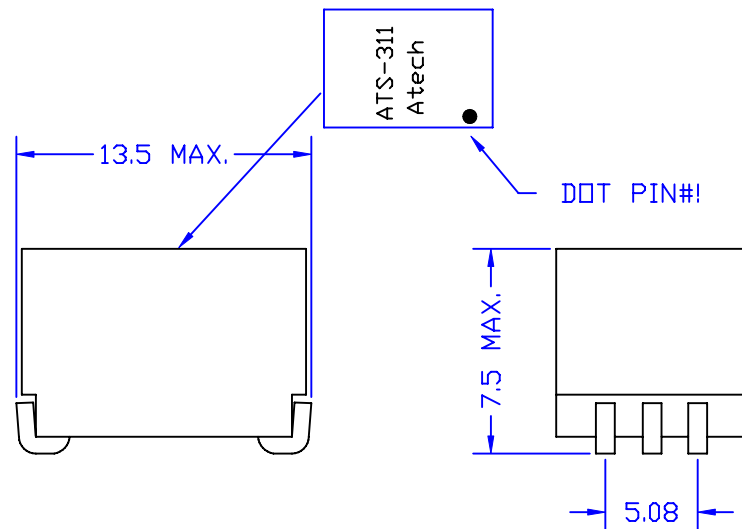

## ELECTRICAL CHARACTERISTICS (P2781 COMPATIBLE)

- DCR: 1-3 = 6-4 = 112 OHM +/- 10%
- INDUCTANCE ( @1KHZ, 0.1Vrms, PARALLEL )  
1-3 = 1.6H MIN.
- INSERTION LOSS ( @2KHZ, 1Vrms ) : 2dB MAX.
- FREQ. RESPONSE ( REF. 2KHZ )  
@200HZ = +/- 0.2dB @4KHZ = +/- 0.1dB.
- RETURN LOSS ( REF. 600 OHM )  
@200HZ = 18dB MIN. @4KHZ = 24dB MIN.
- TURN RATIO ( @1KHZ, 1Vrms ) 1-3 = 6-4 = 1+/-1%
- HI-POT ( @3750VAC, 1mA, 2SEC ) PRI-SEC.
- WORKING TEMP. : -10°C TO +70°C
- RoHS COMPLIANCE.

|                 |  |            |      |         |        |                                     |            |              |
|-----------------|--|------------|------|---------|--------|-------------------------------------|------------|--------------|
|                 |  |            |      |         |        | <b>Atech®</b>                       |            | TITLE        |
|                 |  |            |      |         |        | Atech Technology Co., Ltd.          |            | TRANSFORMER  |
|                 |  |            |      |         |        | TEL:(02)2794-6667 FAX:(02)2794-8004 |            | DWG. NO.     |
|                 |  |            |      |         |        |                                     |            | ATS-311R     |
| A DELETE MFG    |  | 08/28/2006 | PAIR | VINCENT | EUGENE | UNITS:                              | SAFETY     | SHEET 1 OF 1 |
| RELEASE         |  | 10/17/2005 | BART | LYS     | SUEDY  | M/M                                 |            |              |
| NO: DESCRIPTION |  | DATE       | BY   | CHK     | APPD   | DATE                                | P/N:       | DRAW         |
| REVISIONS       |  |            |      |         |        | 10/17/05                            | CTP30802AA | Pair         |