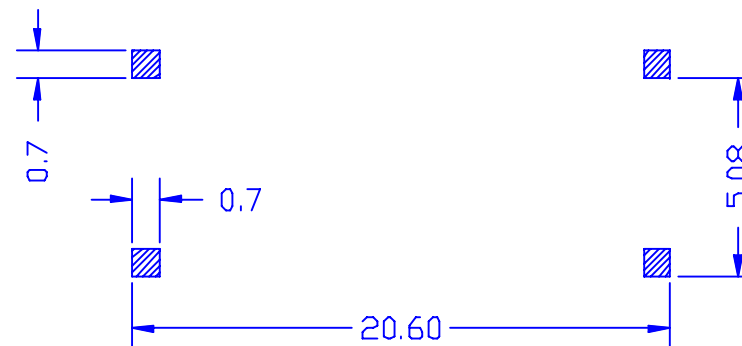
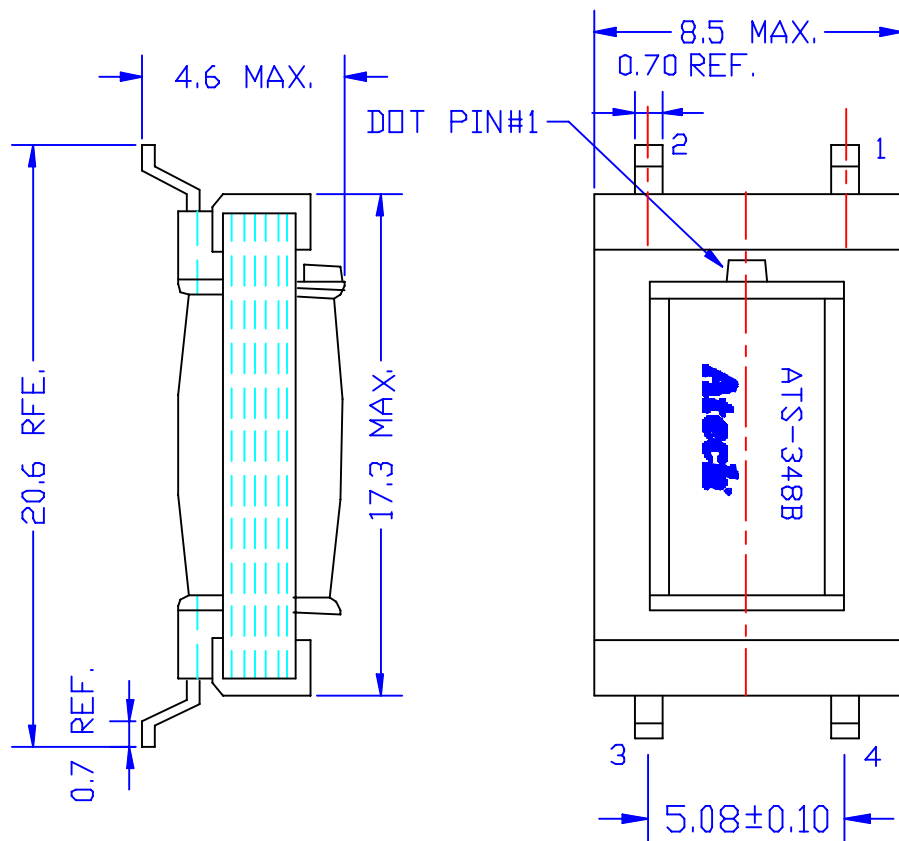


ELECTRICAL CHARACTERISTICS: (FOR V.90, MEET UL1950)

1. D.C.R. : PIN 1-2 = 170 OHM $\pm$ 12%. PIN 3-4 = 150 OHM $\pm$ 12%.
2. INDUCTANCE (@1KHZ, 1Vrms LP) : PIN 1-2 = 2.3Hy MIN.
3. INSERTION LOSS (@ 1KHZ, 0dBm, PIN 3-4 W/H 287 OHM)
PIN 1-2 = 3.5 dB MAX.
4. FREQ. RESP.(REF. 1KHZ) : @200HZ-4KHZ = $\pm$ 0.2dB
5. RETURN LOSS (REF. 600 OHM) : @ 200HZ - 4KHZ = 25dB MIN.
6. TURNS RATIO : PIN 1-2 : PIN4-3 = 1 $\pm$ 1%
7. LONGITUDINAL BAL. = 60dB MIN.(@200-4KHZ)
8. T.H.D. (@600HZ, -10dBm) = -80dB TYP.
9. HI-POT (@1650VAC, 1mA, 2SEC.) PRI. - SEC.
10. RoHS COMPLIANCE

						Atech®		TITLE 600 : 287 TRANSFORMER	
						Atech Technology Co., Ltd.		DWC. NO.	
						TEL: (02) 2784-8887 FAX: (02) 2784-8804		ATS-348BR	
A	DELTD MFG. MARK	01/18 /2007	PAIR	WILLIE	EUGENE	UNITS: M/M		SAFETY	
	RELEASE	09/02 /2005	BART	LYS	SUEDY	DATE		P/N: CTP30803BA	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	Q4/16/99		DRAW Pair	
REVISIONS								SHEET 1 OF 1	