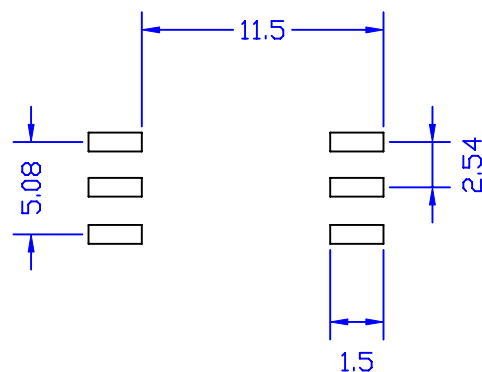
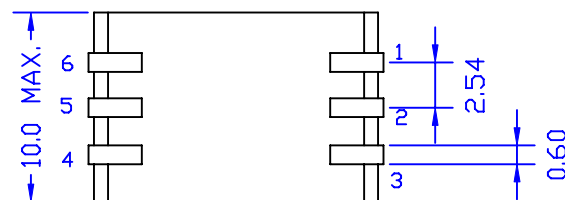
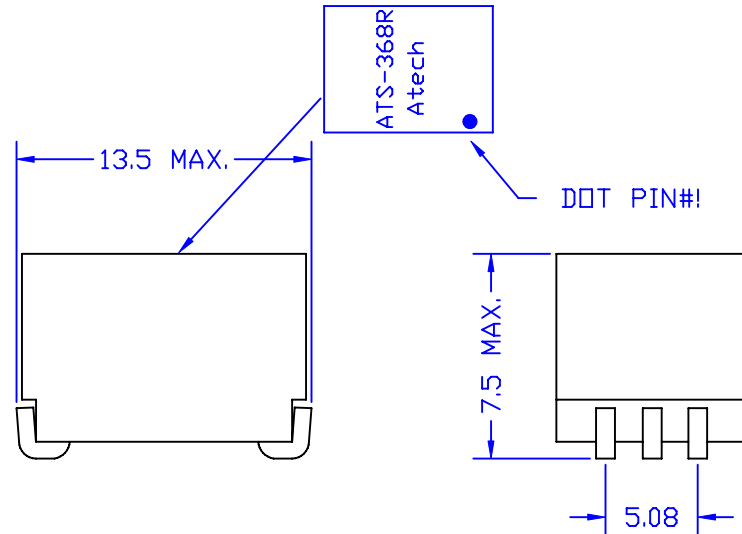


ELECTRICAL CHARACTERISTICS :

1. DCR: 1-3 = 4.6 OHM MAX. 6-4 = 440 OHM MAX.
2. INDUCTANCE (@1KHZ, 0.1Vrms, PARALLEL)
4-6 = 5H MIN.
3. INSERTION LOSS (@1KHZ, 250mVrms) : 1.5dB MAX.
4. FREQ. RESPONSE (REF. 1KHZ)
@200HZ = +/- 0.5dB @4KHZ = +/- 0.3dB.
5. RETURN LOSS (REF. 50 OHM)
@200HZ = 15dB MIN. @4KHZ = 15dB MIN.
6. TURN RATIO (@15KHZ, 1Vrms) 6-4 : 1-3 = 10+/-15%
7. HI-POT (@3750VAC, 1mA, 2SEC) PRI-SEC.
8. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-368R	
	RELEASE	08/29/2006	PAIR		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 08/29/06	P/N: CTP30803DA		
REVISIONS								DRAW <i>Pair</i>	