
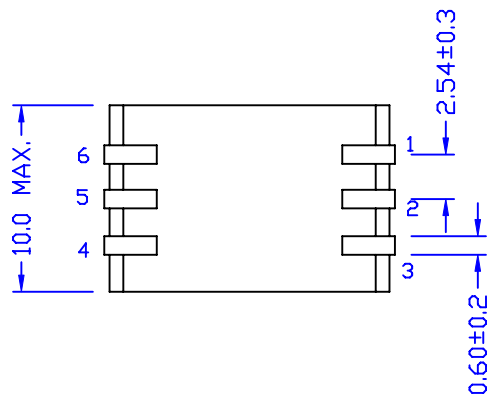
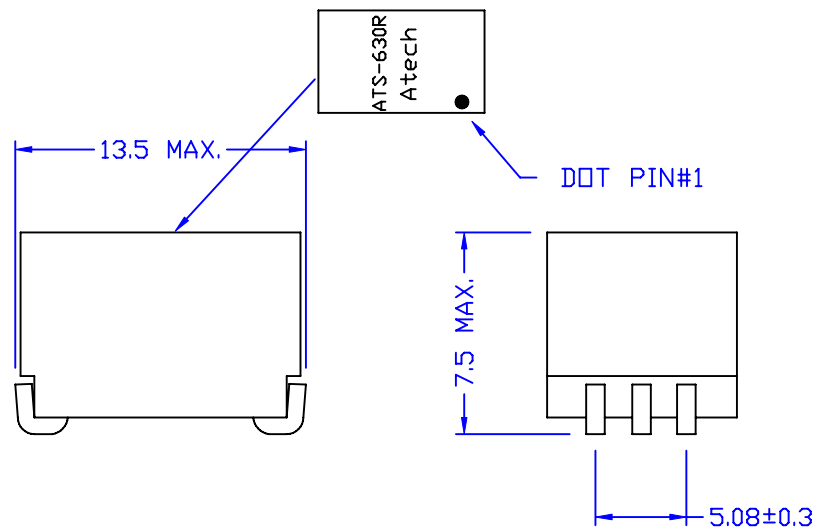


Tolerance: +/- 0.3mm

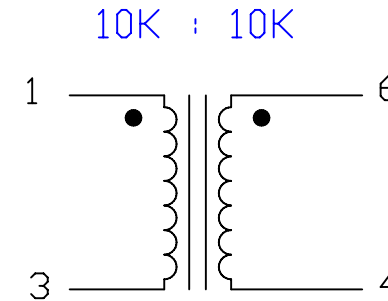

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 4-6 = 1.62 K Ω M $\pm$ 15%.
- INDUCTANCE PARALLEL (@1KHZ, 0.1Vrms) : PIN 1-3 = 25H MIN.
- INSERTION LOSS (@2KHZ, 1Vrms 4-6 W/H 10K Ω M) :
PIN 1-3 = 2dB MAX.
- FREQ. RESP. (@REF 2KHZ) : @200HZ = $\pm$ 0.5dB
@4KHZ = $\pm$ 0.2dB.
- RETURN LOSS (@REF 10K Ω M) : @200HZ = 14dB MIN.
@4KHZ = 14dB MIN.
- TURN RATIO (@7.9KHZ, 1Vrms) : PIN 1-3 : PIN 6-4 = 1 $\pm$ 1%.
- HI-POT (@3750VAC, 1mA, 2SEC) : PRI-SEC
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE 10K : 10K TRANSFORMER	
							DWG. NO. ATS-630R	
	RELEASE	10/07/2005	BART	LYS	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTP30803JA	DRAW <i>Pair</i>
REVISIONS						10/07/05		