
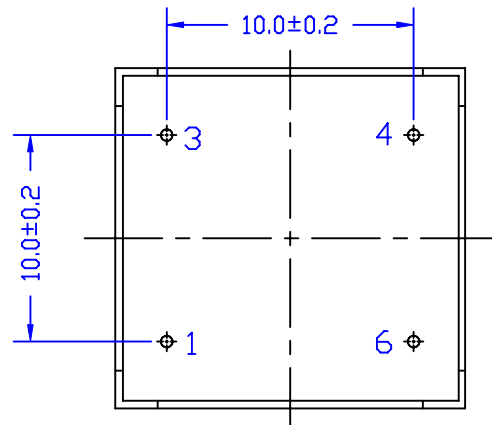
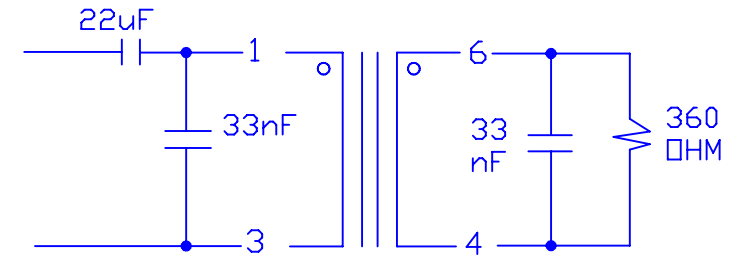
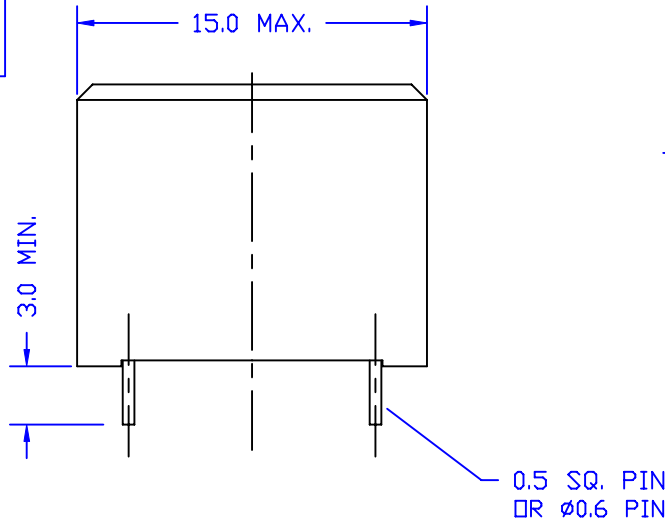


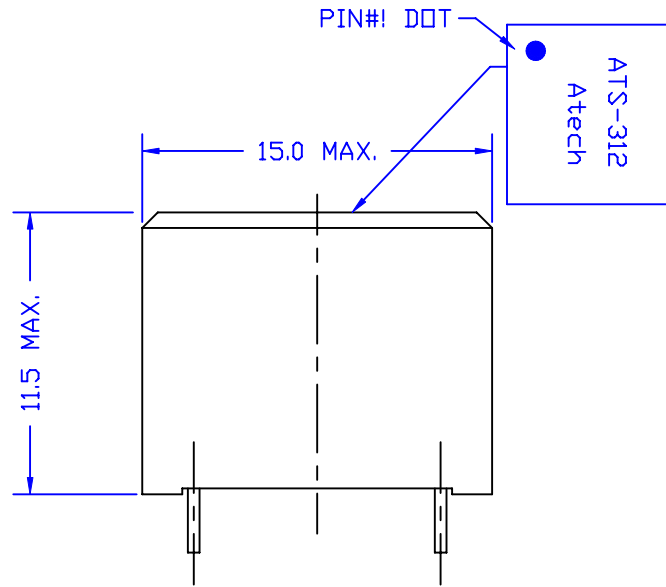

ELECTRICAL CHARACTERISTICS:

1. DCR: 1-3 = 140 OHM +/-10% , 4-6 = 140 OHM +/-10%
2. PARALLEL INDUCTANCE (@200HZ, 0.1Vrms) 1-3 = 10H TYP.
3. INSERTION LOSS (@2KHZ, 0dBm) 1-3 = 3dB MAX.
4. FREQ RESPONSE (REF. 2KHZ) @100HZ-4KHZ = +/-0.2dB
5. TURNS RATIO (@7KHZ, 1Vrms) 1-3 : 6-4 = 1+/-1%
6. HI-POT (@3750VAC, 1mA, 2SEC) PRI-SEC.
7. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 360 TRANSFORMER	
							DWG. NO. ATS-312R	
	RELEASE	05/04/06	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 05/04/06	P/N: CTP313007A	DRAW <i>Pair</i>
REVISIONS								