
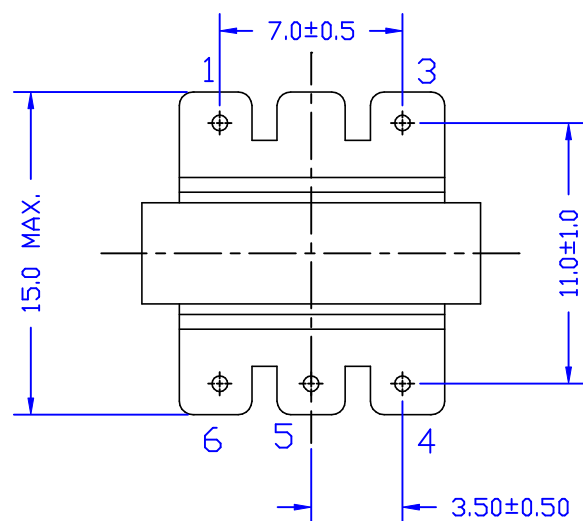
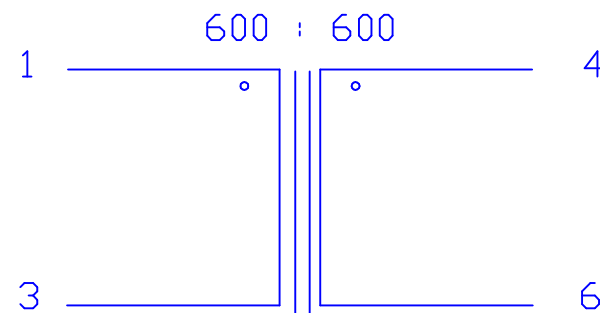


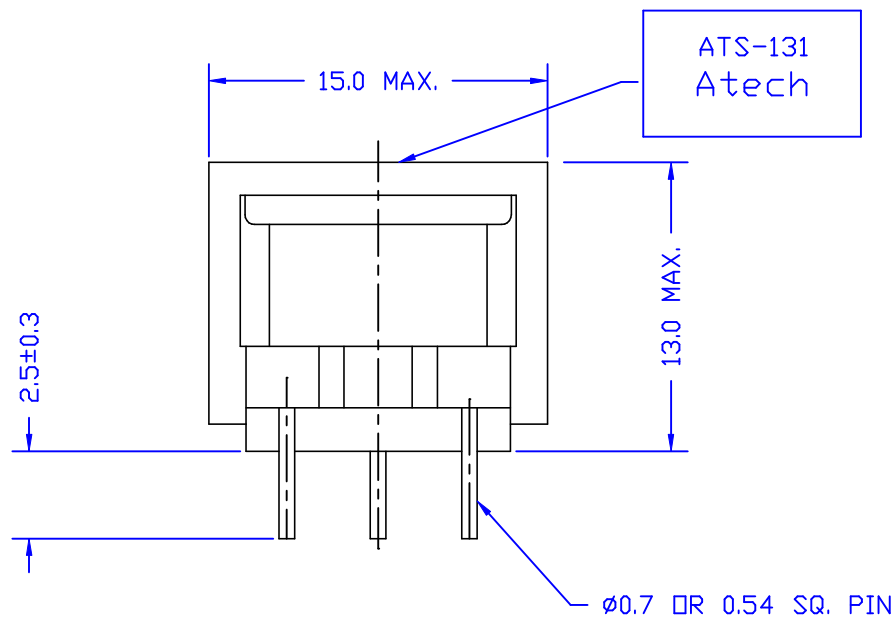

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 30 Ω M+/-15% , PIN 4-6 = 38 Ω M+/-15%
2. PARALLEL INDUCTANCE (@300HZ, 1Vrms) : PIN 1-3 = 1.5H MIN.
3. IMPEDANCE (@1KHZ, 0dBm, 4-6 W/H 600 Ω M)
PIN 1-3 = 600 Ω M+/-5%
4. INSERTION LOSS (@1KHZ, 0dBm, 4-6 W/H 600 Ω M) : 1dB MAX.
5. FREQ. RESP.(REF. 1KHZ): @300HZ = +/-0.35dB
@4KHZ = +/-0.35dB
6. RETURN LOSS (REF. 600 Ω M) : @300HZ = 19 dB MIN.
@1KHZ = 22 dB MIN. @4KHZ = 23 dB MIN.
7. TURNS RATIO (@15KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1+/-1%
8. HI-POT<1200VAC, 1mA, 1MINUTE> : PIN 1-4
9. RoHS COMPLIANCE

						Atech® Atech Technology Co.. Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 600 : 600 TRANSFORMER	
								DWG. NO. ATS-131R	
	RELEASE	02/20/2006	PAIR	EUEGEN	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW	
REVISIONS						02/20/06	CTP314008D	Pair	