
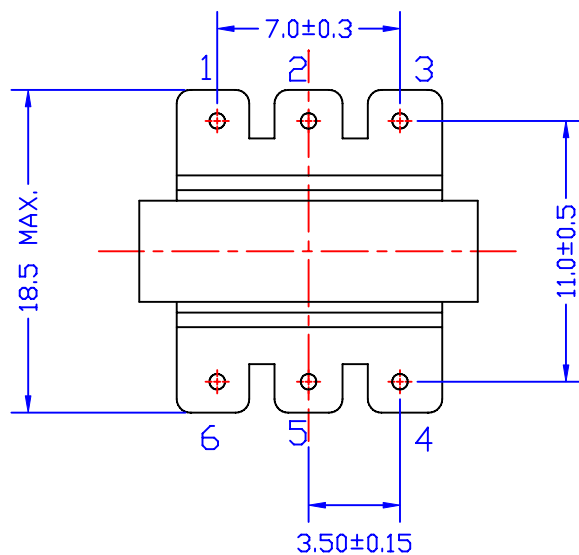


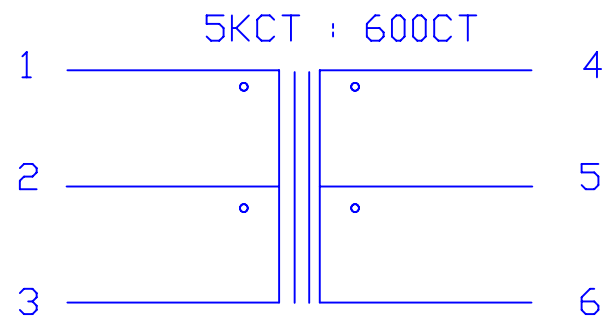

1. D.C.R. : PIN 1-2 = 2-3 = 210 Ω M MAX.
PIN 4-5 = 5-6 = 27 Ω M MAX.
2. PARALLEL INDUCTANCE (@200HZ, 1Vrms) : PIN 1-3 = 21Hy MIN.
3. IMPEDANCE (@1KHZ, 0dBm, 4-6 W/H 600 Ω M)
PIN 1-3 = 1dB MAX.
4. FREQ. RESP.(REF. 1KHZ): @300HZ = +/-0.2dB @4KHZ = $\pm$ 0.2dB
5. RETURN LOSS (REF. 5K Ω M) : @300HZ~4KHZ = 20 dB MIN.
6. HI-POT(1250VAC, 1mA, 1MINUTE) : PRI-SEC
7. RoHS COMPLIANT

							TITLE 5KCT : 600CT TRANSFORMER	
							DWG. NO. ATS-291R	
A	ADD DATE CORE	03/07 /2007	PAIR		EUGENE	Atech Technology Co.. Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		
	RELEASE	01/16 /2007	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTP31400BA	DRAW <i>Pair</i>
REVISIONS								