
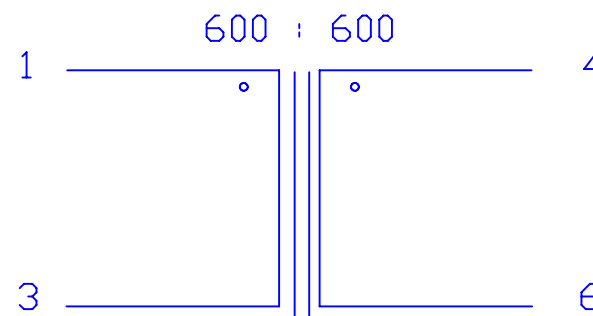
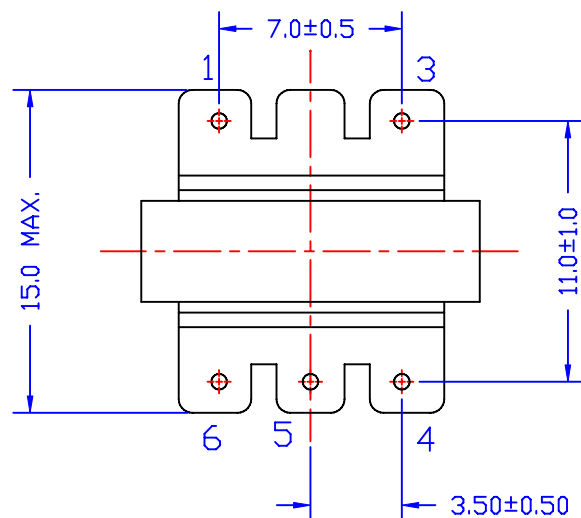


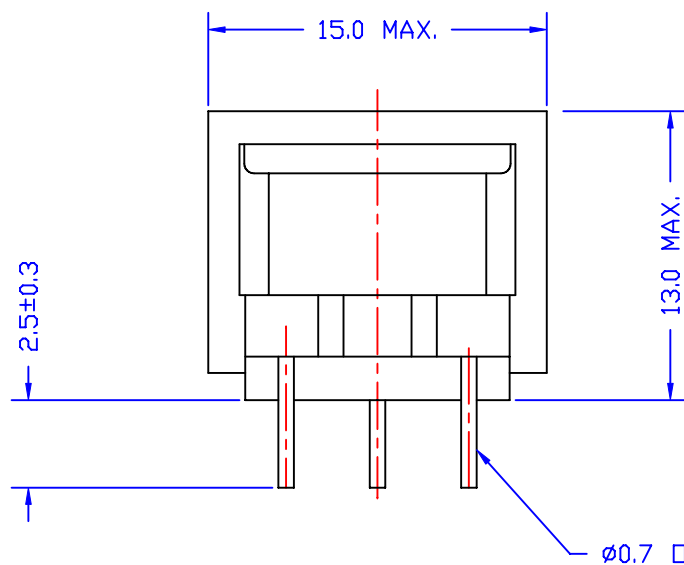

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 30 Ω M+/-15% , PIN 4-6 = 38 Ω M+/-15%
2. PARALLEL INDUCTANCE (@300HZ, 1Vrms) : PIN 1-3 = 1.5H MIN.
3. IMPEDANCE (@1KHZ, 0dBm, 4-6 W/H 600 Ω M)
PIN 1-3 = 600 Ω M+/-5%
4. INSERTION LOSS (@1KHZ, 0dBm, 4-6 W/H 600 Ω M) : 1dB MAX.
5. FREQ. RESP.(REF. 1KHZ): @300HZ = +/-0.35dB
@4KHZ = +/-0.35dB
6. RETURN LOSS (REF. 600 Ω M) : @300HZ = 19 dB MIN.
@1KHZ = 22 dB MIN. @4KHZ = 23 dB MIN.
7. TURNS RATIO (@15KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1+/-1%
8. HI-POT(1200VAC, 1mA, 1MINUTE) : PIN 1-4
9. RoHS COMPLIANCE

						Atech [®]		TITLE 600 : 600 TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.
						TEL: (02) 2794-6667 FAX: (02) 2794-8004		ATS-131DR
RELEASE		05/16/2008	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTP31400DA	DRAW Pair
REVISIONS						05/16/08		