


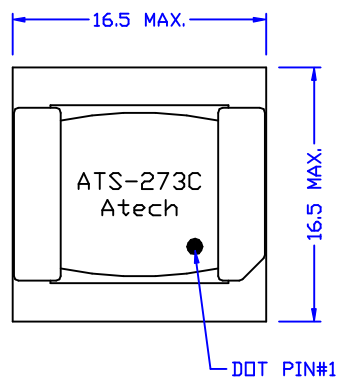


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 6-4 = 105 OHM $\pm$ 12%
PIN 3-1 = 128 OHM $\pm$ 12%
- INDUCTANCE PARREL (@250HZ, 1Vrms) :
PIN 1-3 = 11H MIN.
- RETURN LOSS (@REF. 600 OHM) : @200HZ = 30dB MIN.
@4KHZ = 30dB MIN.
- INSERTION LOSS (@1KHZ, 0dBm, 4-6 W/H 360 OHM, 1-3 W/H 12nF) :
PIN 1-3 = 3dB MAX.
- FREQ. RESPONSE (@REF. 1KHZ) : @200HZ = $\pm$ 0.3dB
@4KHZ = $\pm$ 0.3dB
- TURN RATIO (@9KHZ, 1Vrms) : PIN 1-3 : PIN 6-4 = 1 $\pm$ 1%
- HI-POT (@1250VAC, 1mA, 2SEC) : PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004	TITLE 600 : 360 TRANSFORMER	
A	12nF 600:360	11/06 /2003	BART	AL	SUEDY		DWG. NO. ATS-273C	
RELEASE		06/03 /2002	DOLLY	CPLIU	SUEDY	UNITS: M/M DATE	SAFETY	SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD			DRAW Pair
REVISIONS						06/03/02		