
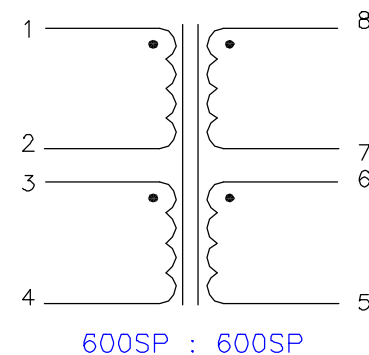
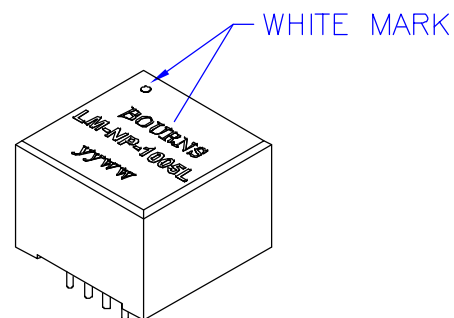
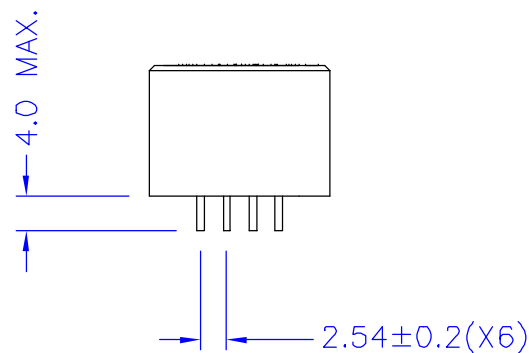


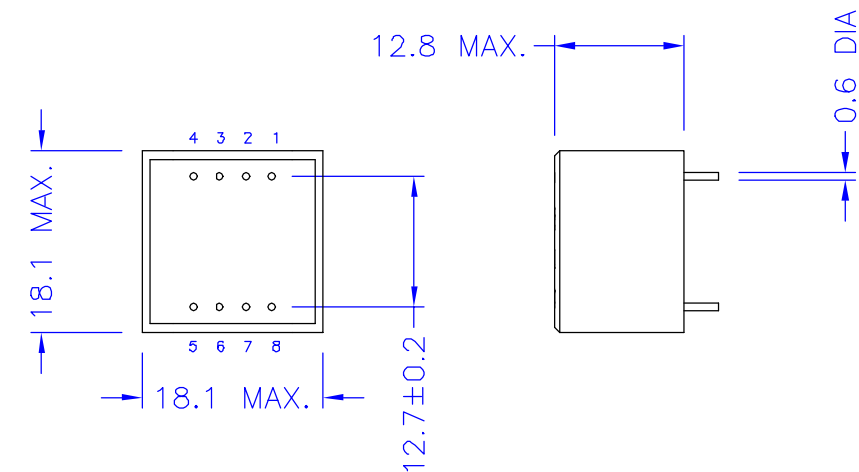

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 (2-3 SHORT) = 66 OHM $\pm$ 10%
PIN 5-8 (7-6 SHROT) = 66 OHM $\pm$ 10%
- PARALLEL INDUCTANCE (@200HZ, 1Vrms) :
PIN 1-4(2-3 SHROT) = 5-8(7-6 SHROT) = 2.8H MIN.
- IMPEDANCE (@1KHZ, 1Vrms, 2-3, 7-6 SHROT, W/H 600 OHM LOAD) :
PIN 1-4 = 600 OHM $\pm$ 22%
- INSERTION LOSS (@2KHZ, 1Vrms, 2-3, 7-6 SHROT, W/H 600 OHM LOAD):
PIN 1-4 = 1.5dB MAX.
- FREQ. RESP. : (REF. 1KHZ, 2-3, 7-6 SHROT, W/H 600 OHM LOAD)
@200HZ = -0.3dB MAX.
@4KHZ = -0.3dB MAX.
@10KHZ = -2.0dB MAX.
- RETURN LOSS : (REF. 600 OHM, 2-3, 7-6 SHROT,)
@200HZ = 18dB MIN.
@1KHZ = 18dB MIN.
@4KHZ = 12dB MIN.
- TURN RATIO : (@10KHZ, 1Vrms)
PIN 1-4(2-3 SHROT) : PIN 8-5 (7-6 SHROT) = 1 $\pm$ 1%
- LONGITUDINAL BALANCE (@ 2-3, 7-6 SHROT, W/H 600 OHM LOAD) :
@300HZ - 4KHZ = 80dB MIN.
- T.H.D. : (@1.KHZ, 0dB, 2-3, 7-6 SHROT, W/H 600 OHM LOAD) = 0.1% MAX.
- HI-POT : (@4KVAC, 1mA, 1MINUTE) PRI-SEC.
- ROHS

None tolerance for reference

B	SPEC.	08/02/2005	BART	EDLYS	SUEDY	Atech [®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE TRANSFORMER
	DIM.	04/20/2005	BART	FRANKSU	SUEDY		DWG. NO. LM-NP-1005L
	RELEASE	04/08/2005	pair	Suedy	Suedy	UNITS: M/M	SAFETY
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 04/08/05	SHEET 1 OF 1 DRAW <i>Pair</i>
REVISIONS							