
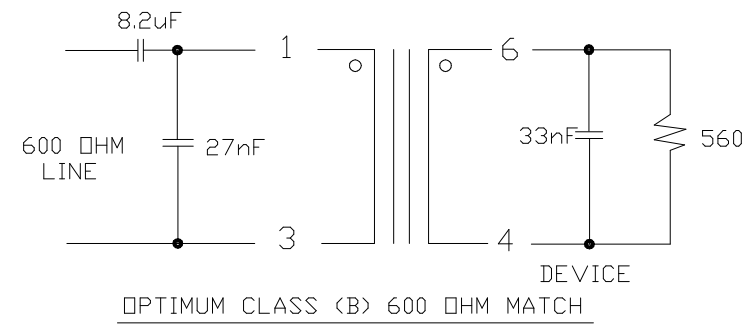
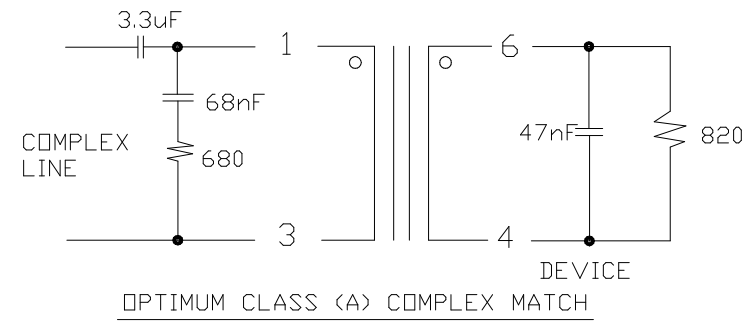
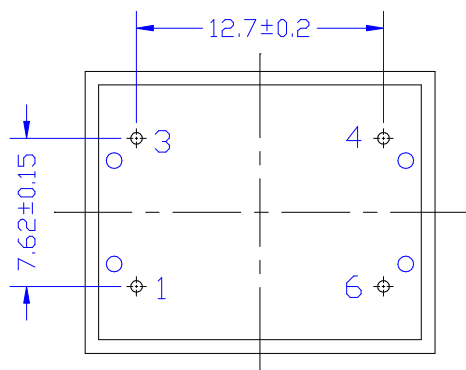


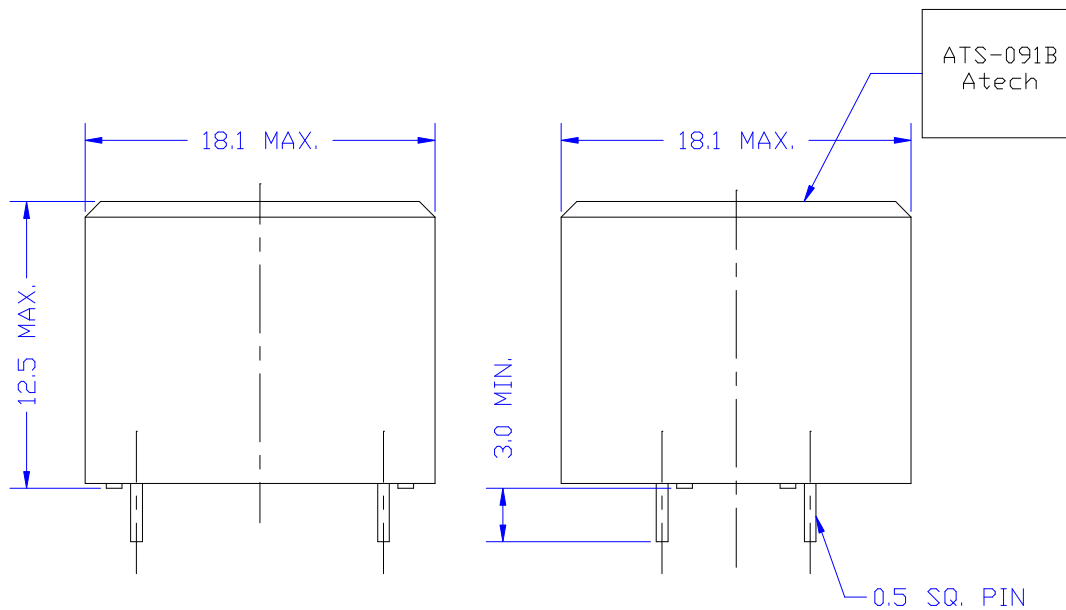

ELECTRICAL CHARACTERISTICS : (COMPATIBLE WITH P2001 FOR V.32bis)

1. D.C.R. : PIN 1-3 = 65 OHM $\pm$ 8% , PIN 6-4 = 65 OHM $\pm$ 8%.
2. INDUCTANCE (@200HZ, 10mVrms, PARALLEL) : PIN 1-3 = 4.8H MIN.
3. Q.(@200HZ, 10mVrms) : PIN 1-3 = 1.5 MIN.
4. LEAKAGE INDUCTANCE(@200HZ, 10mVrms, SERIES) : PIN 1-3 = 19mH MAX.
5. RETURN LOSS : (REF. 600 OHM) 300 TO 4KHZ = 23 dB MIN.
6. INSERTION LOSS : (@1KHZ, 1Vrms) 1.15 dB MAX.
7. FREQ. RESPONSE : (REF. 1KHZ) 300 TO 4KHZ = $\pm$ 0.19 dB.
8. LONGITUDINAL BALANCE : 200HZ - 4KHZ = 80dB MIN.
9. TURN RATIO : (@5KHZ, 0.1Vrms) PIN 1-3 : 6-4 = 1 $\pm$ 1%
10. DISTORTION : 450HZ, 0dbm : -86 dB MAX.
11. HI-POT : (3750VAC, 1mA, 1MIN.) PIN 1-6
12. RoHS COMPLIANCE.

NONE TOLERANCE FOR REFERENCE

						Atech® Atech Technology Co.. Ltd. TEL: (02)2794-6667 FAX: (02)2794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-091BR	
	RELEASE	09/07/2005	BART	LYS	SUEDY	UNITS:	SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N : CTP31601XA	SHEET 1 OF 1 DRAW <i>Pair</i>
REVISIONS						09/07/05		