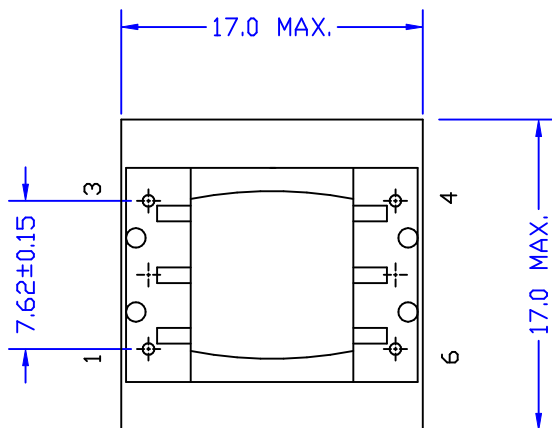
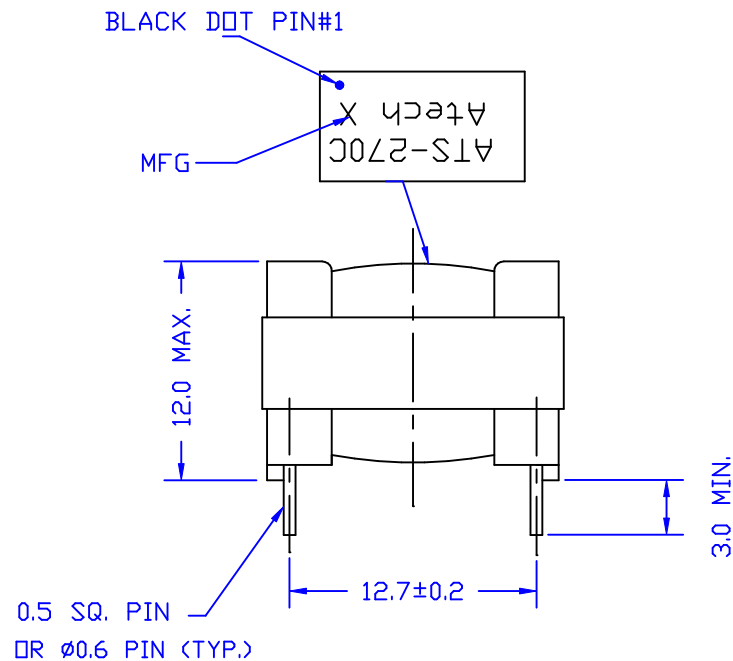


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 108 OHM ±10%.
PIN 4-6 = 120 OHM ±10%.
- INDUCTANCE (@200Hz, 1Vrms, PARALLEL) :
PIN 1-3 = 2.83 H MIN.
- RETURN LOSS (@REF. 600 OHM) :
300Hz = 12 dB MIN.
3.5KHz = 12 dB MIN.
- INSERTION LOSS (@0 dBm, PIN 4-6 W/H 374 OHM) :
1KHz = 2.5 dB MAX.
- FREQ. RESPONSE (REF. 1KHz) :
200Hz = ±0.2 dB.
4KHz = ±0.2 dB.
- TURN RATIO (@1KHz, 1Vrms) :
PIN 1-3:4-6 = 1 ±1%.
- HI-POT (@3750 VAC, 1mA, 2SEC) :
PIN 1-6

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL: (02) 2794-6667 FAX: (02) 2794-8004		DWG. NO.
								ATS-270C
RELEASE		09/06/2005	BART	LYS	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	P/N	DRAW
						09/06/05	CTP316027A	Pair