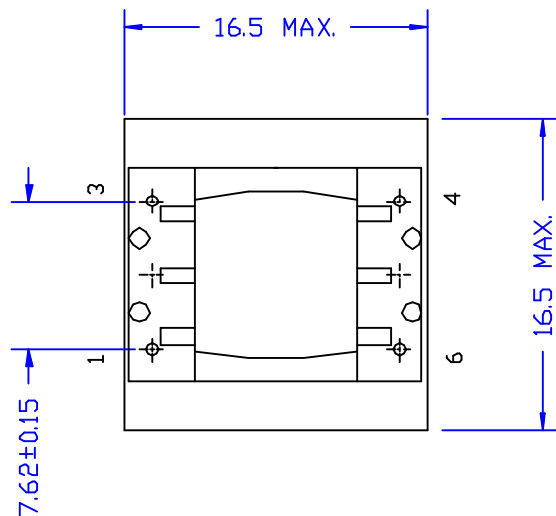
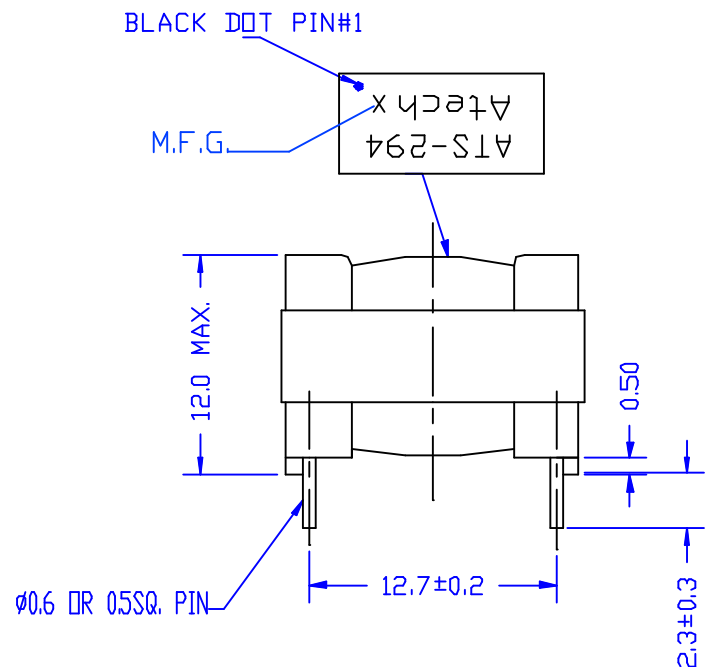


ELECTRICAL CHARACTERISTICS: (FOR V.34)

1. D.C.R. : PIN 1-3 = 45 OHM MAX. PIN 6-4 = 45 OHM MAX.
2. INDUCTANCE (@200HZ, 1Vrms, PARALLEL): PIN 1-3 = 8H MIN.(14H TYP.)
3. RETURN LOSS : (REF. 600 OHM) 250 TO 4KHZ = 20dB MIN.
4. INSERTION LOSS : (1KHZ, 0dBm) 1dB MAX.
5. FREQ. RESPONSE: (REF. 1KHZ) 200 TO 4KHZ = +/-0.12dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 70dB MIN.
7. TURN RATIO : (10KHZ, 1Vrms) PIN 1-3 : 6-4 = 1+/-1%
8. DISTORTION : 600HZ, -10dBm : -85dB MAX.
9. HI-POT : (@1250VAC. 1mA, 2SEC) PIN 1-6
10. RoHS COMPLIANCE

					Atech®		TITLE 600 : 600 TRANSFORMER	
					Atech Technology Co., Ltd.		DWG. NO.	
					TEL: (02) 2794-6867 FAX: (02) 2794-8804		ATS-294R	
RELEASE		07/08/2005	BART	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N : CTP316031A	SHEET 1 OF 1
REVISIONS					07/08/05		DRAW Pair	