
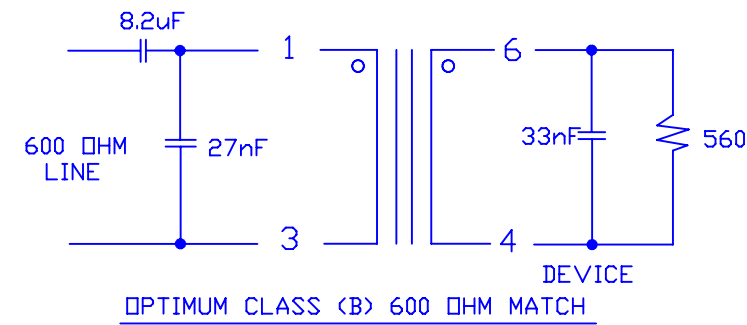
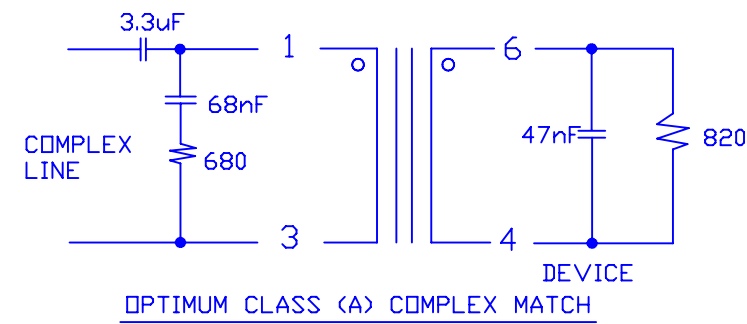
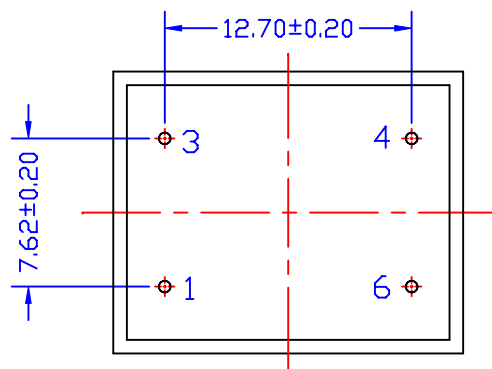
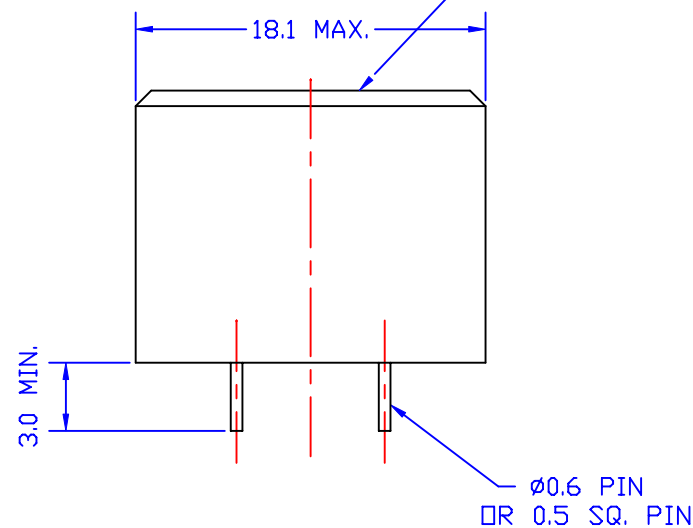


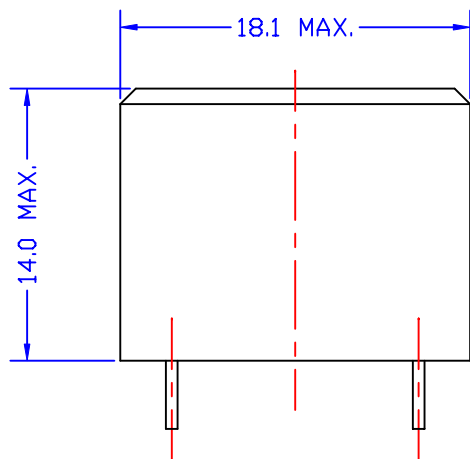

ELECTRICAL CHARACTERISTICS : (COMPATIBLE WITH P1200 FOR V.32bis)

1. D.C.R. : PIN 1-3 = 6-4 = 65 OHM $\pm$ 5%
2. INDUCTANCE (@200HZ, 10mVrms, PARALLEL) : PIN 1-3 = 4.15H MIN.
3. LEAKAGE INDUCTANCE (@200HZ, 10mVrms, SERIES) : PIN 1-3 = 20mH MAX.
4. RETURN LOSS : (REF. 600 OHM) 300HZ = 21dB MIN.
1KHZ = 21dB MIN.
4KHZ = 21dB MIN.
5. INSERTION LOSS : (@1KHZ, 1Vrms) 1-3 = 1.3dB MAX.
6. FREQ. RESPONSE : (REF. 1KHZ) 300 TO 4KHZ = $\pm$ 0.5dB
7. TURN RATIO : (@6KHZ, 0.1Vrms) PIN 1-3 : 6-4 = 1 $\pm$ 1%
8. DISTORTION : 300HZ, 0dbm : -77dB MAX.
9. HI-POT : (3750VAC, 1mA, 1MIN.) PIN 1-6
10. RoHS COMPLIANT

D	HIGH DIM, HI-POT	10/19/2007	PAIR	MICHAEL	EUGENE	Atech [®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE	TRANSFORMER
C	RL	10/18/2007	PAIR	MICHAEL	EUGENE		DWG. NO.	ATS-079AR
B	DIM.14.0 CHANGE TO 12.5	09/18/2006	PAIR	ANGEL	EUGENE			
	RELEASE	02/07/2006	PAIR	EUGENE	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	P/N:	DRAW
							CTP316032A	Pair