
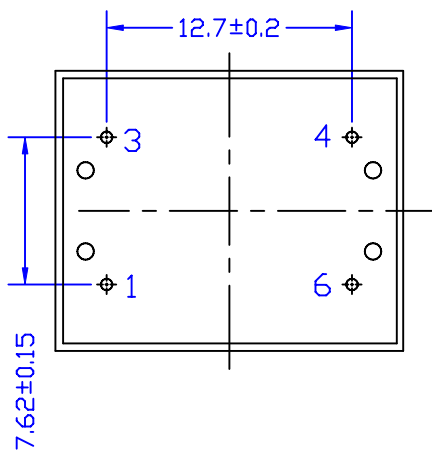
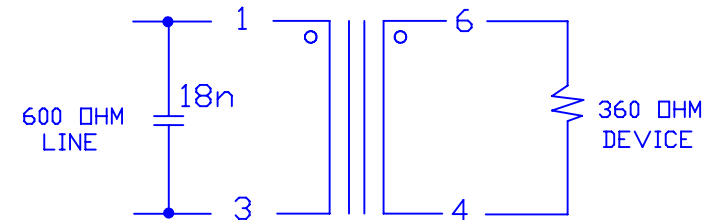


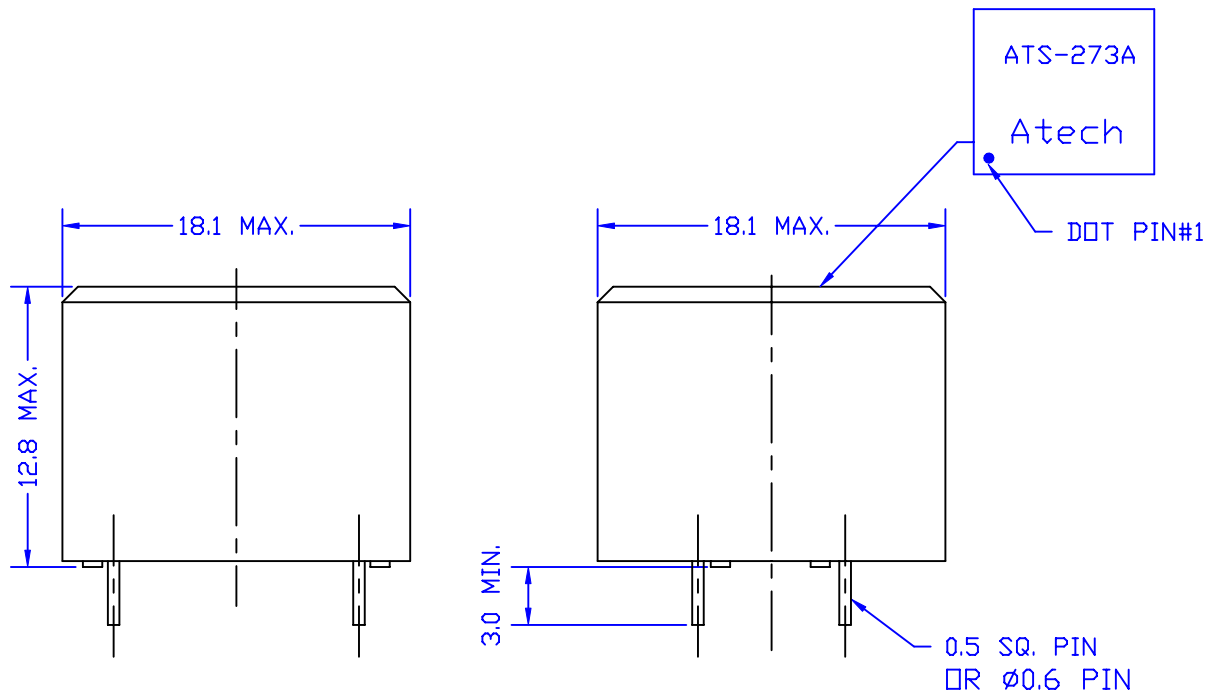

ELECTRICAL CHARACTERISTICS: (FOR 56Kbps, 2811B COMPATIBLE)

1. D.C.R. : PIN 1-3 = 120 OHM+/-10% PIN 6-4 = 120 OHM+/-10%
2. INDUCTANCE (@200HZ, 1Vrms, PARALLEL) : PIN 1-3 = 18H MIN.
3. RETURN LOSS : (REF. 600 OHM) 200 TO 3.5KHZ = 25dB MIN.
4. INSERTION LOSS : (1KHZ, 0dBm) 2.1 dB TYP.
5. FREQ. RESPONSE: (REF. 1KHZ) 100 TO 4KHZ = +/-0.1dB
6. LONGITUDINAL BALANCE : 200HZ-3.5KHZ 60dB MIN.
7. TURN RATIO : (1KHZ, 1Vrms) PIN 1-3 : 6-4 = 1+/-1%
8. DISTORTION : 150HZ, -3dBm : -75dB MAX.
9. HI-POT : (<@1650VAC, 1mA, 2SEC.) PIN 1-6
10. RoHS COMPLIANT

						Atech [®] Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE 600 : 360 TRANSFORMER	
							DWG. NO. ATS-273AR	
A	LABEL	07/19/2006	PAIR	AL	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	05/04/2006	PAIR	AL	SUEDY			
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						05/04/06	CTP316034A	<i>Pair</i>