
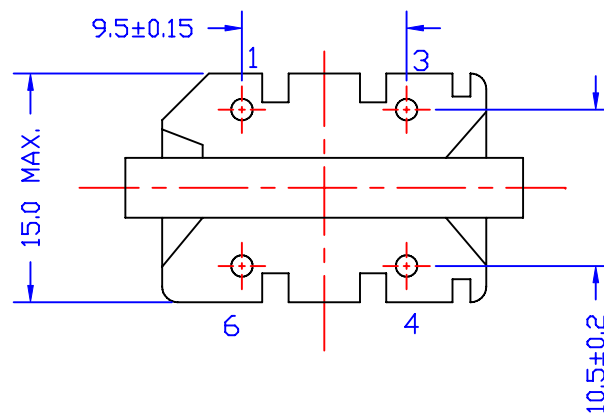
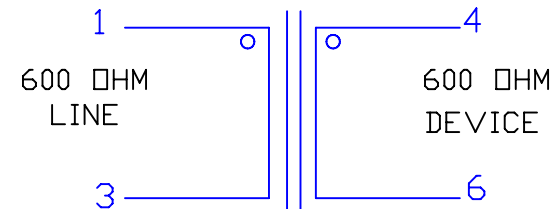


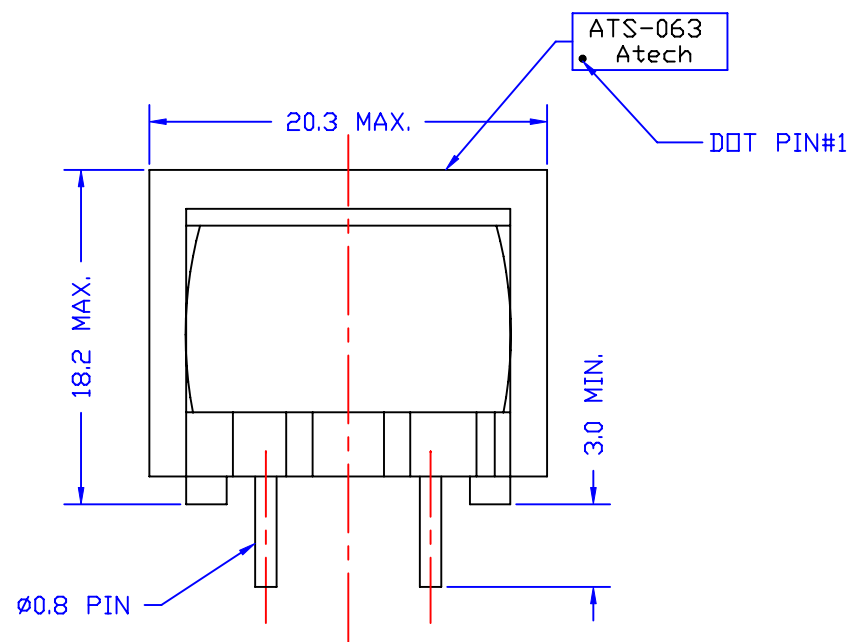

ELECTRICAL CHARACTERISTICS: (671-8205 COMPATIBLE)

1. D.C.R. : 1-3 = 37 OHMS +/- 10 PERCENT
4-6 = 51 OHMS +/- 10 PERCENT
- 2 IMPEDANCE : (<@ 1KHZ, 1Vrms, PIN 4-6 W/H 600 OHM LOAD>
PIN 1-3 = 600 OHM +/- 10%
- 3 INSERTION LOSS : 0.8 dB MAX. AT 1 kHz
- 4 FREQUENCY RESPONSE : +/- 0.5dB, 300 TO 3.5kHz
- 5 RETURN LOSS : 300 Hz = 26dB MIN.
1KHz = 26dB MIN.
3.5KHz = 25.5dB MIN.
- 6 HI-POT : (<1250 VAC, 1mA, 1MINUTE> LINE TO DEVICE

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE TRANSFORMER
B	RETURN LOSS	11/06 /2006	PAIR	WILLIE	EUGENE		DWG. NO. ATS-063
A	LABEL	03/25 /2005	BART	MICHAEL	SUEDY		
RELEASE			PAIR		SUEDY	UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTP319002A
REVISIONS						DRAW Pair	
						SHEET 1 OF 1	