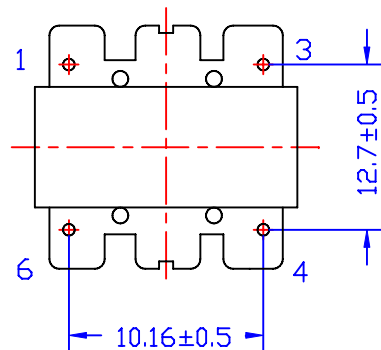
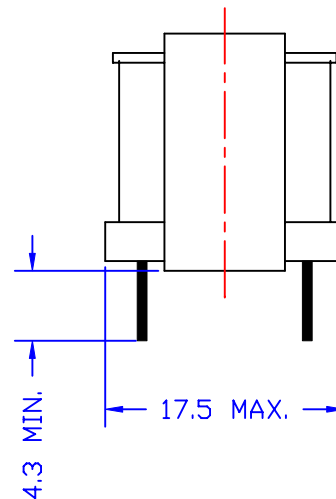
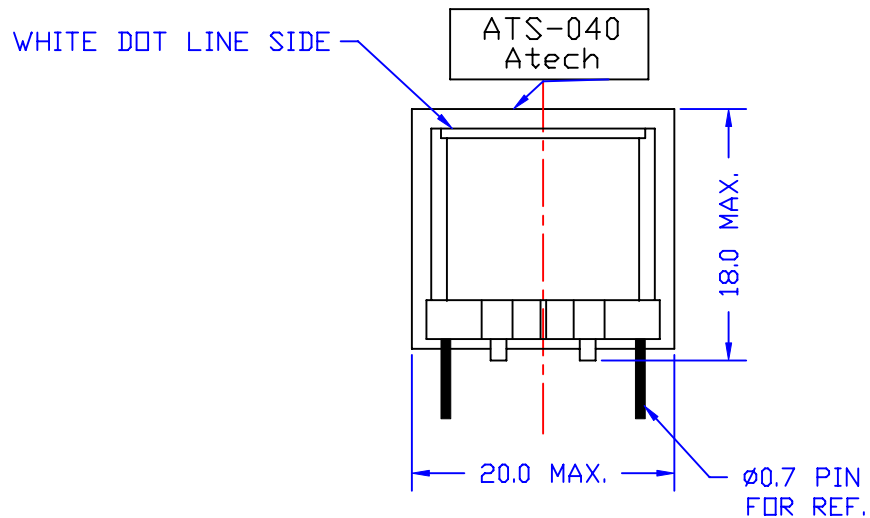


ELECTRICAL CHARACTERISTICS:

- 1 D.C.R. : PIN 1-3 = 40 Ω HM MAX, PIN 4-6 = 50 Ω HM MAX.
- 2 INDUCTANCE :(@1KHZ, 1Vrms) PIN 1-3 = 1.0H MIN.
- 3 IMPEDANCE :(@1KHZ,1Vrms, PIN 4-6 W/H 600 Ω HM) PIN 1-3 = 600 Ω HM $\pm$ 10%
- 4 INSERTION LOSS(@1KHZ,1Vrms, PIN 4-6 W/H 600 Ω HM)=0.8 dB MAX.
- 5 FREQ. RESP.(REF.1KHZ):@300HZ = $\pm$ 0.2dB
@4KHZ = $\pm$ 0.2dB
- 6 RETURN LOSS : (PIN 4-6 W/H 600 Ω HM, REF. 600 Ω HM)
@300HZ = 26 dB MIN.
@1KHZ = 26 dB MIN.
@3400HZ = 25 dB MIN.
- 7 HI-POT(@1500VAC, 1mA, 1MINUTE): PRI-SEC-CORE
- 8 INSULATION RESISTANCE(@200 VDC) 1-4 = 100 M Ω HM MIN.
- 9 RoHS COMPLIANCE

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
A TEST PIN NO.						TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.
								ATS-040R
RELEASE		09/15/2005	BART	LYS	SUEDY	UNITS:	SAFETY	
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	P/N:	SHEET 1 OF 1
						09/15/05	CTP31900GA	DRAW Pair