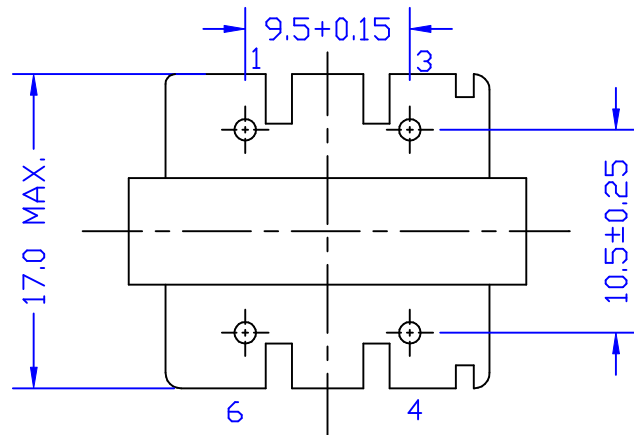
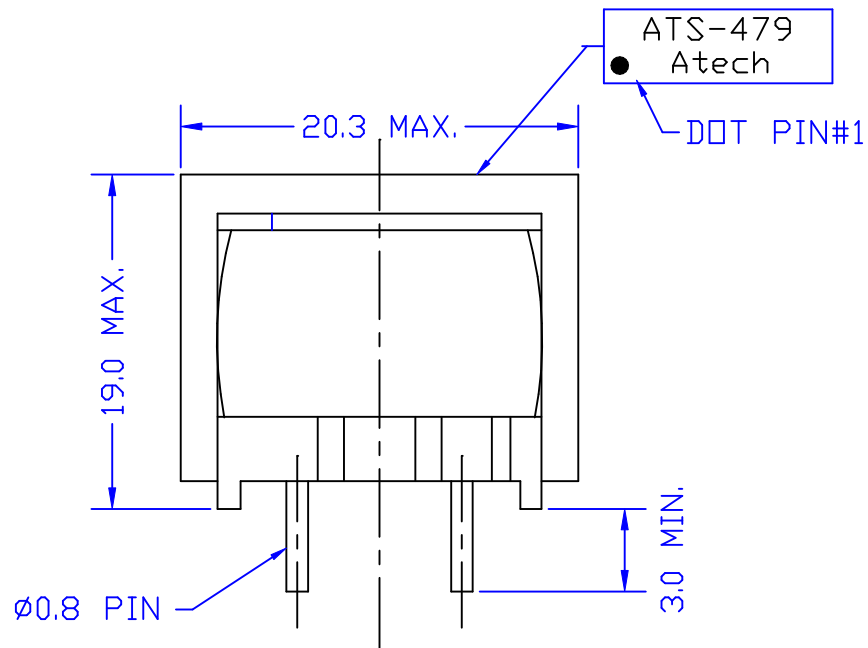


ELECTRICAL CHARACTERISTICS: (FOR 671-1619 COMPATIBLE)

1. D.C.R. : PIN 1-3 = 27.2 Ω M $\pm$ 12%,
PIN 4-6 = 12.6 Ω M $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-3 = 1.9 H MIN.
3. IMPEDANCE (@1KHZ, 1Vrms, PIN 4-6 W/H 600 Ω M) :
PIN 1-3 = 4000 Ω M $\pm$ 10%
4. INSERTION LOSS (@1KHZ, PIN 4-6 W/H 600 Ω M) :
PIN 1-3 = 1.0 dB MAX.
5. FREQUENCY RESPONSE (@REF 1KHZ) :
(@300 - 3500HZ) = $\pm$ 0.5dB
6. HI-POT (@1500VAC, 1mA, 2SEC) = 1-4-CORE
7. RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 4000: 600 TRANSFORMER	
							DWG. NO. ATS-479R	
	RELEASE	01/25/2006	BART		SUEDY		UNITS: M/M	
NO:	DESCRIPTION	DATE	BY	CHK	APPD		SAFETY	
						DATE	P/N:	SHEET 1 OF 1
REVISIONS						01/25/06	CTP31900RA	DRAW <i>Pair</i>