
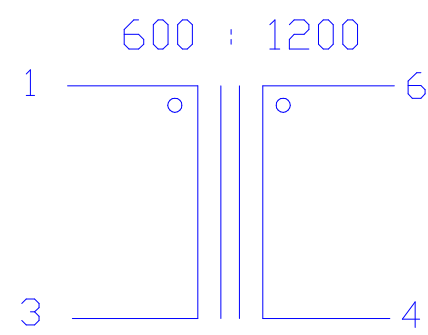
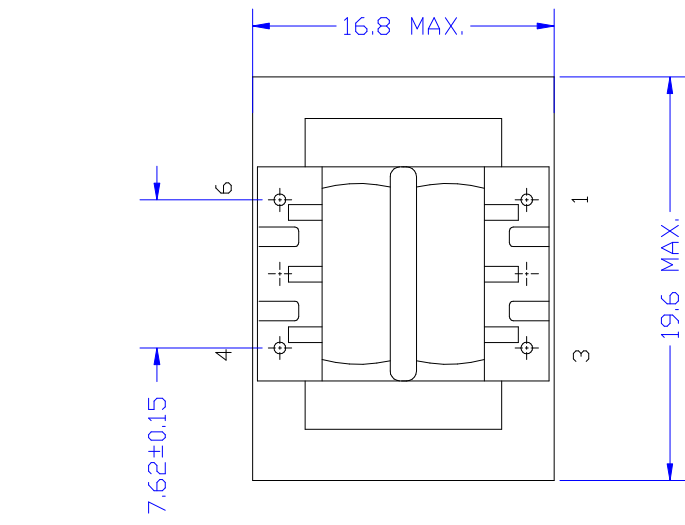


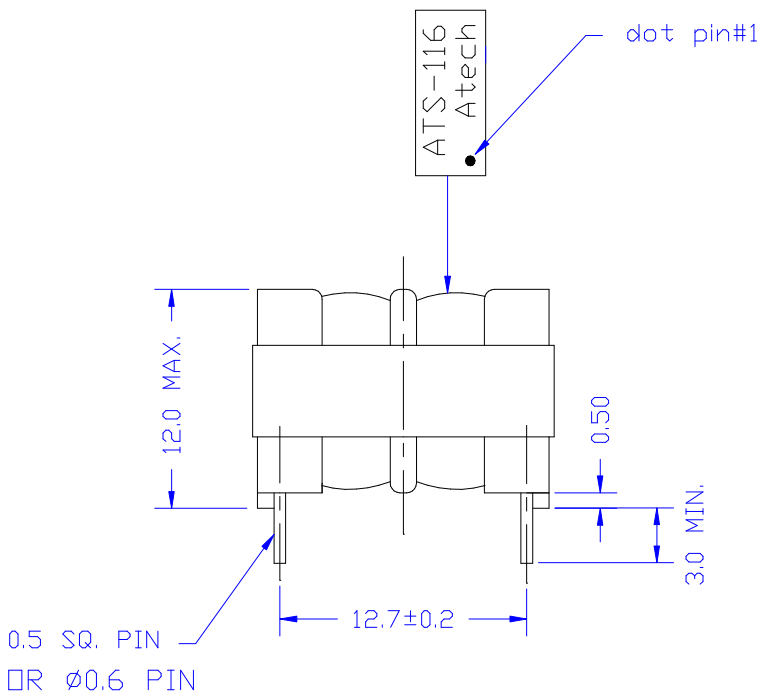

ELECTRICAL CHARACTERISTICS: (FOR V.32bis)

1. D.C.R. : PIN 1-3 = 14 Ω M MAX. PIN 4-6 = 32 Ω M MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-3 = 650mH MIN.
3. IMPEDANCE : (@1KHZ, 1Vrms, PIN 4-6 W/H 1200 Ω M)
PIN 1-3 = 600 Ω M+/-5%
4. INSERTION LOSS : (@1KHZ,1Vrms PIN 4-6 W/H 1200 Ω M)
PIN 1-3 = 0.5dB MAX.
5. RETURN LOSS : (REF. 600 Ω M, PIN 4-6 W/H 1200 Ω M)
@300HZ = 23dB MIN.
@1KHZ = 25dB MIN.
@4KHZ = 20dB MIN.
7. FREQ. RESPONSE: (REF. 1KHZ) @300 HZ = +/-0.2dB
@4KHZ = +/-0.2dB
8. T.H.D. (@600HZ, -10 dBm) = -80 dB MAX.
9. HI-POT : (@3750VAC, 1mA, 1MINUTE) PIN 1-4
10. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 600 : 1200 TRANSFORMER	
								DWG. NO. ATS-116R	
	RELEASE	04/13/2006	PAIR	EUGENE	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTP31900TA		DRAW <i>Pair</i>
REVISIONS						04/13/06			