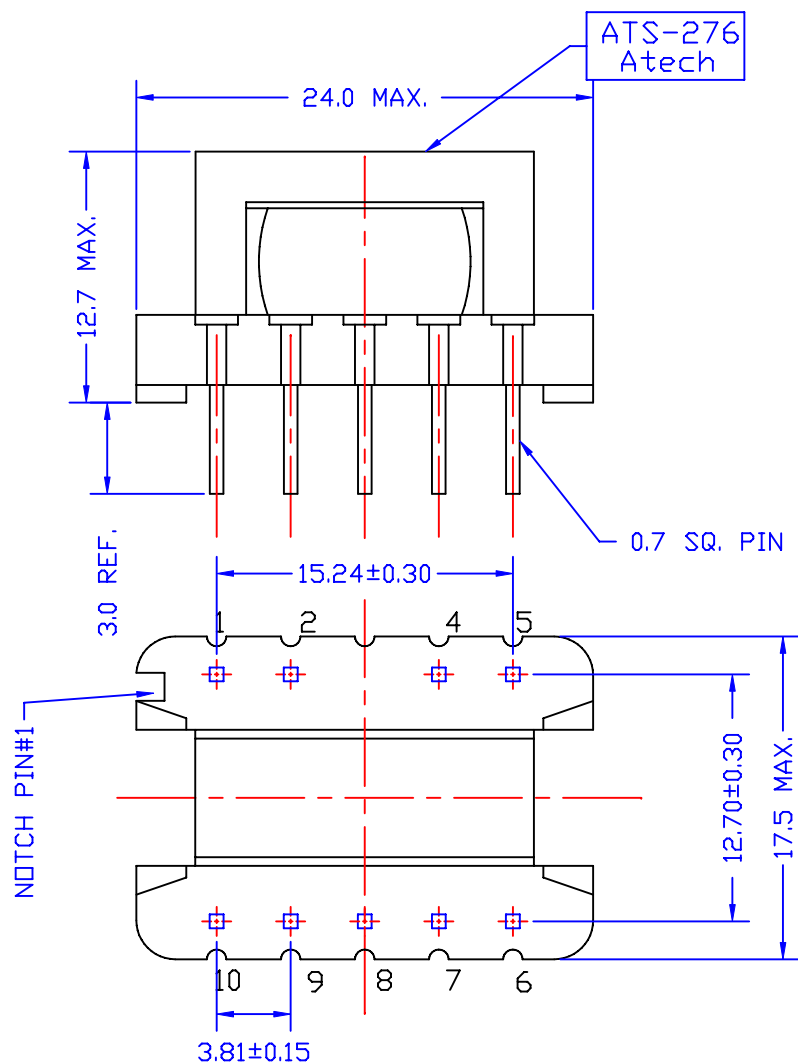


ELECTRICAL CHARACTERISTICS : (671-8268 COMPATIBLE)

1. D.C.R. : PIN 2-4 = 47 OHM+/-15% PIN 7-9 = 52 OHM+/-15%
2. INDUCTANCE : (@1KHZ, 1Vrms, LS) PIN 7-9 = 1.3 Hy MIN.
3. INSERTION LOSS :(@1KHZ, 0dBm, TX TO LINE) 4dB MAX.
4. FREQ. RESP. (REF. 1KHZ) 300 - 3400HZ = +/-0.3dB
5. TRANSHYBRID LOSS : (Rb = 332 OHM)
300 - 3400 HZ = 30dB MIN.
6. LONGITUDINAL BALANCE : MEET FCC PART 68
7. HI-POT : (@ 1250VAC, 1mA, 2SEC.) PRI-SEC.

						Atech[®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE HYBRID TRANSFORMER	
B	PIN DIM	10/21/00	PAIR		SUEDY		DWG. NO. ATS-276	
A	ADD UL	02/09/98	PAIR		SUEDY			
	RELEASE		PAIR		SUEDY			
NO:	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
						DATE	P/N: CTP319011A	DRAW <i>Pair</i>
REVISIONS								