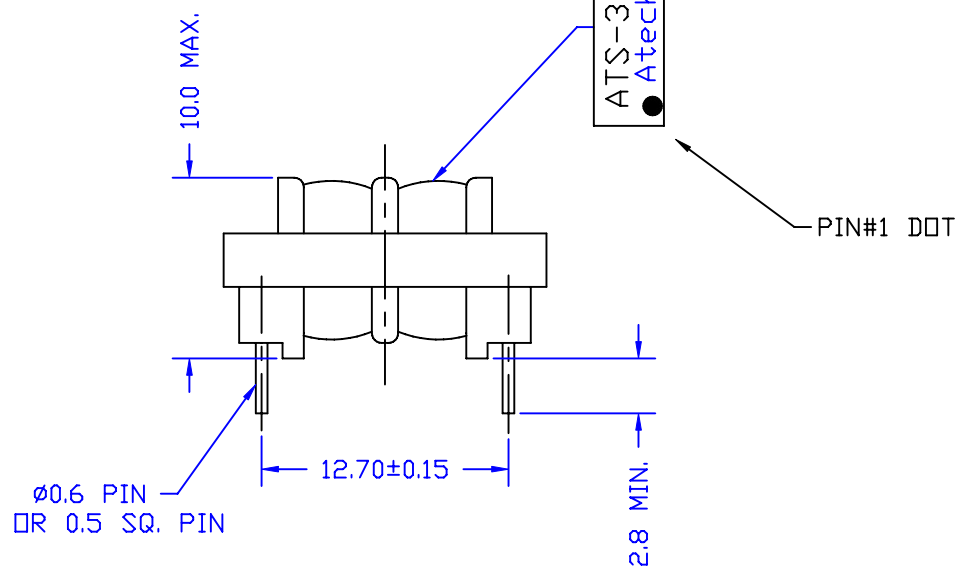


ELECTRICAL CHARACTERISTICS:

- 1 D.C.R. : PIN 4-1 = 5.8 Ω M MAX. PIN 5-8 = 5.8 Ω M MAX.
- 2 INDUCTANCE : (@1KHZ, 1Vrms) PIN 4-1 = 100 mH MIN
- 3 IMPEDANCE : (@1KHZ, 1Vrms, PIN 5-8 W/H 150 Ω M LOAD)
PIN 4-1 = 150 Ω M +/-10%
- 4 INSERTION LOSS : (@1KHZ, 0.25Vrms, PIN 5-8 W/H 150 Ω M LOAD)
1.0 dB MAX.
- 5 FREQ. RESP. : (REF. 1KHZ)@300HZ = +/-0.4dB
@4KHZ = +/-0.2dB
- 6 RETURN LOSS : (REF. 150 Ω M)@300HZ = 18dB MIN.
@1KHZ = 20dB MIN. @4KHZ = 18dB MIN.
- 7 TURN RATIO : (@1KHZ, 1Vrms) PIN 4-1 : PIN 5-8 = 1 +/-1%
- 8 POLARITY : PIN 4 & 5 INPHASE
- 9 LOGITUDINAL BALANCE : @300HZ~ 4KHZ = 60 dB MIN.
- 10 HI-POT(@3750Vrms, 1mA, 2SEC.) PRI-SEC
- 11 INSULATION RESISTANCE(@1KVAC, 60HZ) PRI-SEC = 100M Ω M MIN.

						Atech® Atech Technology Co., Ltd. TEL: (02)2794-6667 FAX: (02)2794-8004	TITLE 150 : 150 TRANSFORMER	
							DWG. NO. ATS-308	
A	REF. 150 OHM	03/22/99	PAIR		SUEDY			
	RELEASE	08/13/98	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						08/13/98	CTP319012A	<i>Pair</i>