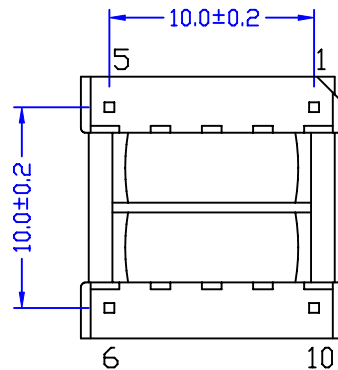
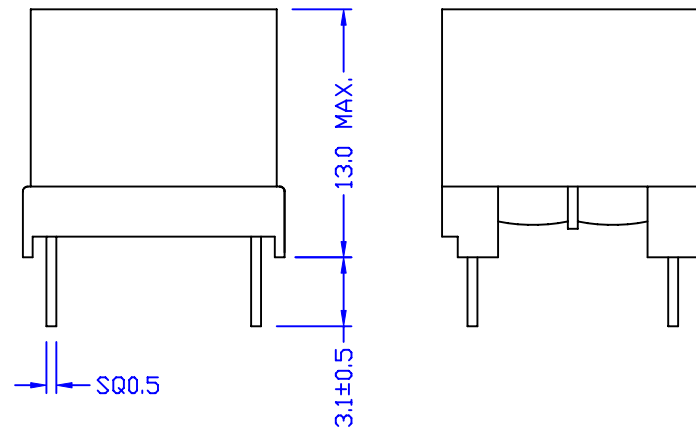
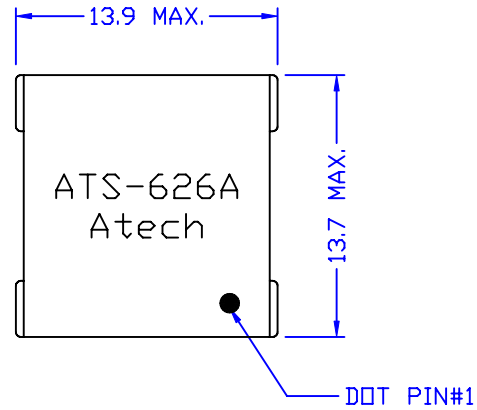


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-5 = 6-10 = 12 OHM $\pm$ 12%
- INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-10 (5-6 SHORT) = 20mH $\pm$ 5%
(@100mA) : PIN 1-10 (5-6 SHORT) = 18mH MIN.
- TURN RATIO (@125KHZ, 1Vrms) : PIN 1-5 : PIN 6-10 = 1 $\pm$ 3%
- HI-POT (@500VDC, 1mA, 2SEC) : PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE	POTS FILTER INDUCTOR
B	DIMENSION	08/24/2006	PAIR		EUGENE		DWG. NO.	
A	T/R	04/15/2004	BART	AL	SUEDY			ATS-626A
	RELEASE	06/30/2003	RORY	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTP413003A	DRAW <i>Pair</i>
REVISIONS								