

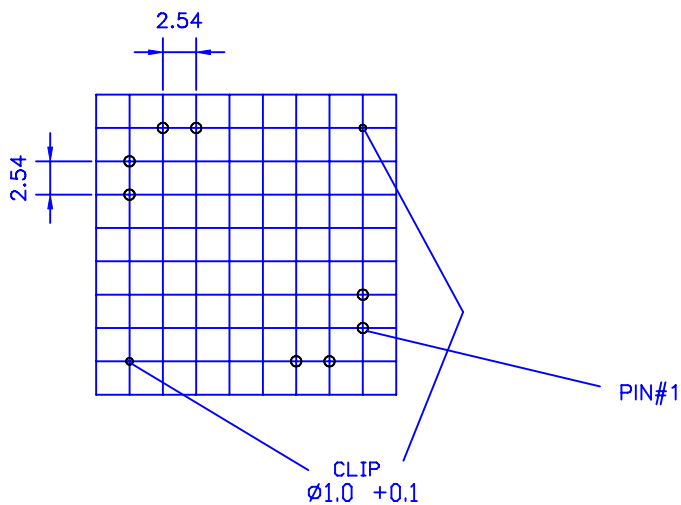
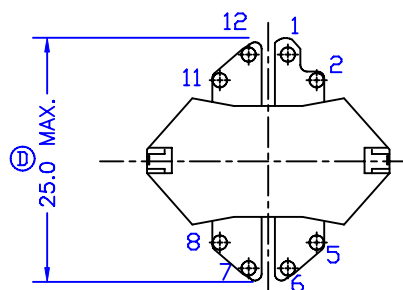


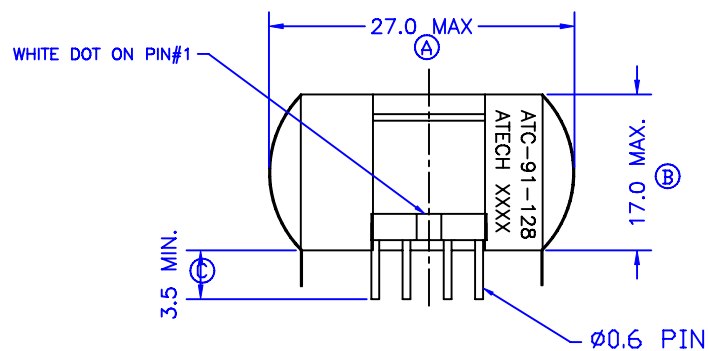

GRID 2.54



ELECTRICAL CHARACTERISTICS:

1. D.C.R : 2-5 = 11-8 = 102 OHM $\pm 10\%$
2. INDUCTANCE (@1KHZ, 1Vrms) : 2-5 = 9.3 OHM MIN.
3. Z (@1KHZ, 1Vrms, 11-8 W/H 600 OHM LOAD) :
2-5 = 800 $\pm 2\%$ OHM
4. INSERTION LOSS (@1KHZ, 1Vrms, 11-8 W/H 600 OHM LOAD) 1.30 ± 0.2 dB
5. FREQ. RESP (REF. 1KHZ) :
@20HZ = ± 0.35 dB
@100HZ = ± 0.1 dB
@4KHZ = ± 0.1 dB
@50KHZ = ± 0.1 dB
6. TURN RATIO (@1KHZ, 1Vrms) : 2-5 : 11-8 = 1 $\pm 1\%$
7. HI-POT (200VAC, 2mA, 1 SEC) : PRI-SEC-CORE
8. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE	TRANSFORMER
							DWG. NO.	ATC-91-128R
	RELEASE	05/29/2008	Pair	Willie	Eugene	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						05/29/08	CTP808002A	<i>Pair</i>