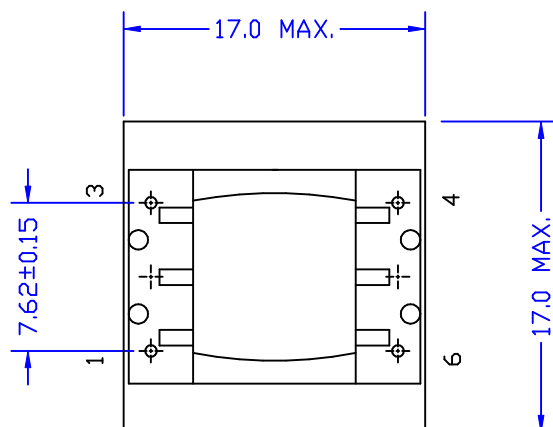
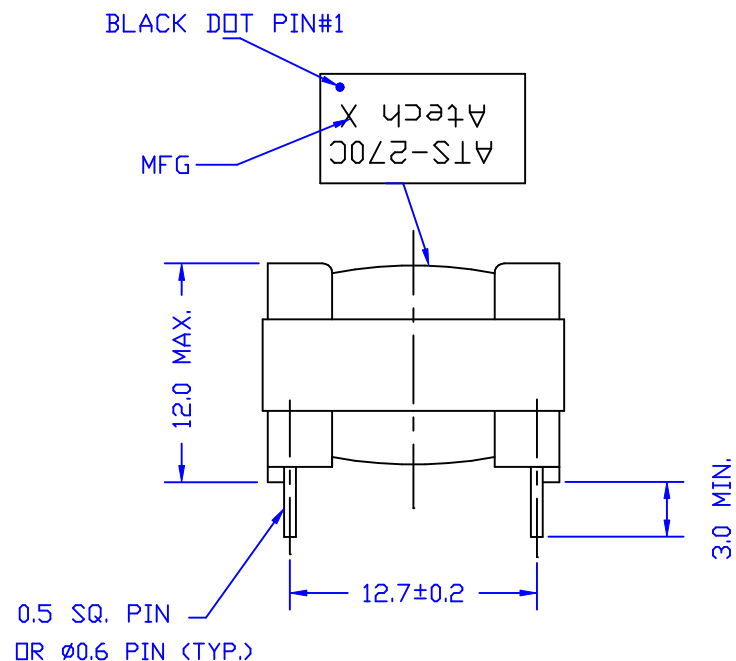


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 108 Ω HM $\pm 10\%$.
PIN 4-6 = 120 Ω HM $\pm 10\%$.
- INDUCTANCE (@200Hz, 1Vrms, PARALLEL) :
PIN 1-3 = 2.83 H MIN.
- RETURN LOSS (@REF. 600 Ω HM) :
300Hz = 12 dB MIN.
3.5KHz = 12 dB MIN.
- INSERTION LOSS (@0 dBm, PIN 4-6 W/H 374 Ω HM) :
1KHz = 2.5 dB MAX.
- FREQ. RESPONSE (REF. 1KHz) :
200Hz = ± 0.2 dB.
4KHz = ± 0.2 dB.
- TURN RATIO (@1KHz, 1Vrms) :
PIN 1-3:4-6 = 1 $\pm 1\%$.
- HI-POT (@3750 VAC, 1mA, 2SEC) :
PIN 1-6
- RoHS COMPLINACE

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.
								ATS-270CR
RELEASE		02/07/2006	PAIR	LYS	SUEDY	UNITS:	SAFETY	
NO.		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	P/N:	SHEET 1 OF 1
						09/06/05	CTPH16000A	DRAW Pair