
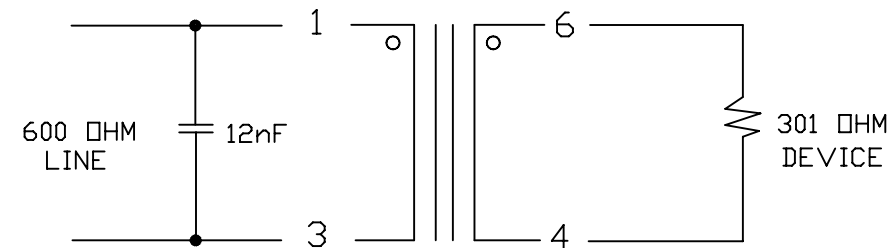
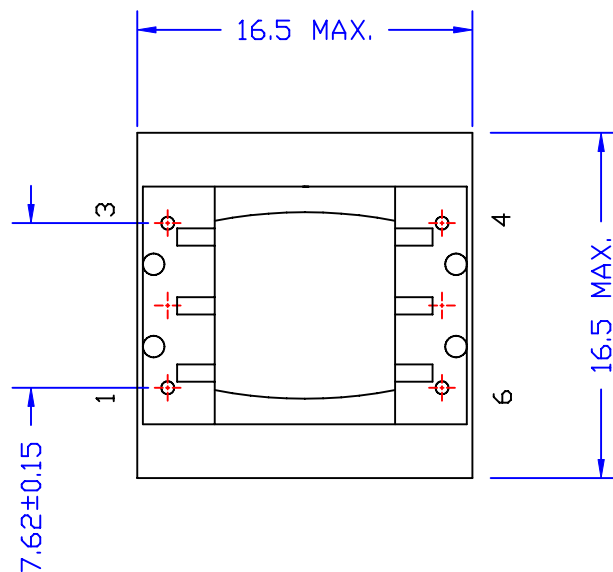


BLACK DOT PIN#1

ATS-256

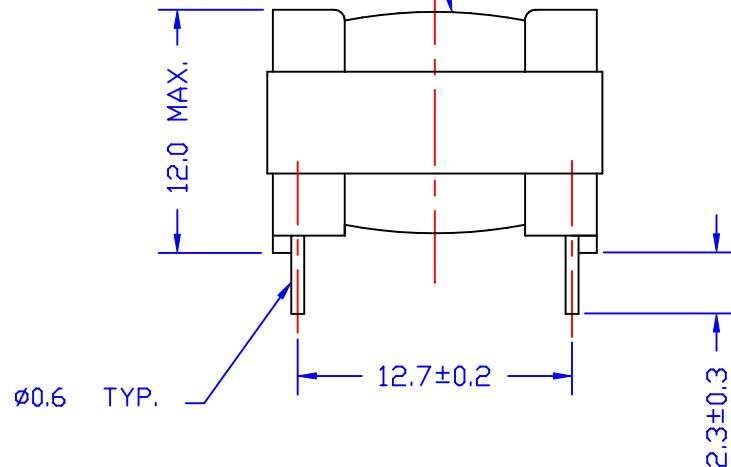

OPTIMUM CLASS (B) 600 OHM MATCH

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 150 OHM $\pm 10\%$.
PIN 4-6 = 150 OHM $\pm 10\%$.
- INDUCTANCE (@1KHz/0.1Vrms) :
PIN 1-3 = 7.2 H MIN.
- INSERTION LOSS :
(@1KHz, 0dBm) = 3 dB ± 0.3 dB.
- FREQ. RESPONSE (REF. 1KHz) :
@200Hz = ± 0.2 dB
@4KHz = ± 0.2 dB.
- RETURN LOSS (REF. 600 OHM) :
@200 Hz = 30 dB MIN.
@4 KHz = 30 dB MIN.
- TURN RATIO (@1KHz, 0.1 Vrms) :
PIN 1-3:6-4 = 1 $\pm 1\%$.
- HI-POT (@1250VAC, 1mA, 2SEC) :
PRI-SEC
- RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.
								ATS-256CR
RELEASE		07/17/2006	BART	MICHAEL	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	P/N:	DRAW
						07/17/06	CTPH16003A	Pair