
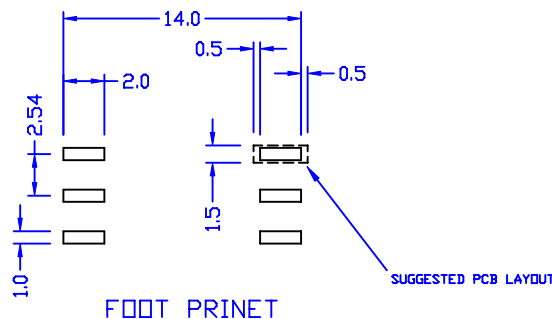
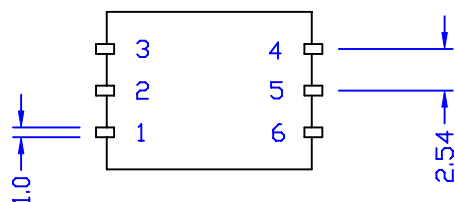






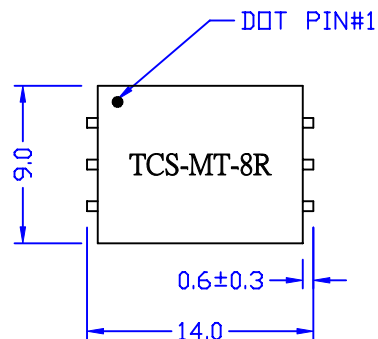

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 115 OHM $\pm 15\%$
PIN 4-6 = 115 OHM $\pm 15\%$
- INDUCTANCE PARALLEL (@200HZ, 0.78Vrms) : PIN 1-3 = 3.0H MIN.
RESISTANCE PARALLEL 7500 OHM MIN.
- LEAKAGE INDUCTANCE (@1KHZ, 0.1Vrms) :
PIN 1-3 (4-6 SHORT) = 6mH MAX.
- INSERTION LOSS (@2KHZ, 0dBm) :
PIN 1-3 (4-6 W/H 412 OHM) = 2 dB MAX.
- FREQ. RESP (@REF 2KHZ) :
FROM 200HZ~4KHZ = ± 0.25 dB.
- RETURN LOSS (@REF 600 OHM) :
FROM 200HZ~4KHZ = 24 dB MIN.
- TURN RATIO (@15KHZ, 1Vrms) :
PIN 1-3 : 6-4 = $1 \pm 1\%$.
- HI-POT (@4.0KVAC, 0.5mA, 2SEC) : P-S
- INSULATION RESISTANCE 100M OHM MIN.@500VDC
- REEL PACKING
- RoHS COMPLIANT

TOLERANCE : ± 0.25

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO.
								ATS-888AR
RELEASE		04/09/2008	PAIR	Vincent	Eugene	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	P/N	DRAW
						04/09	CTPL08009A	Pair