
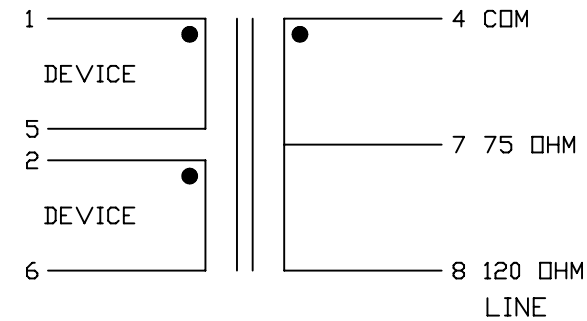
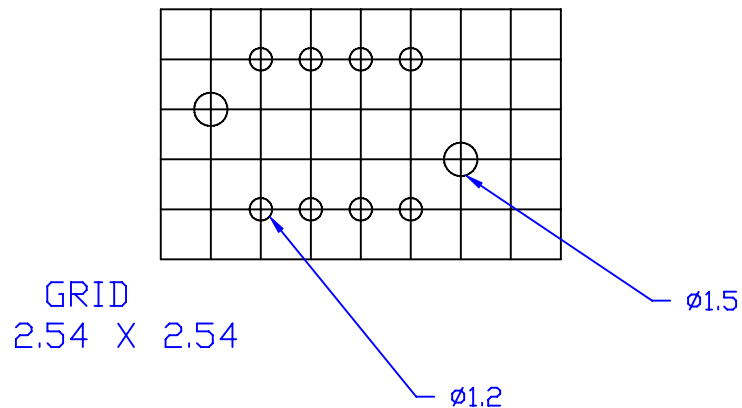
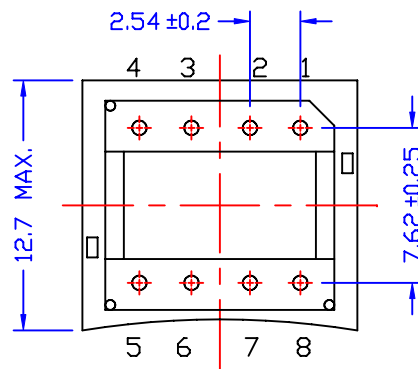


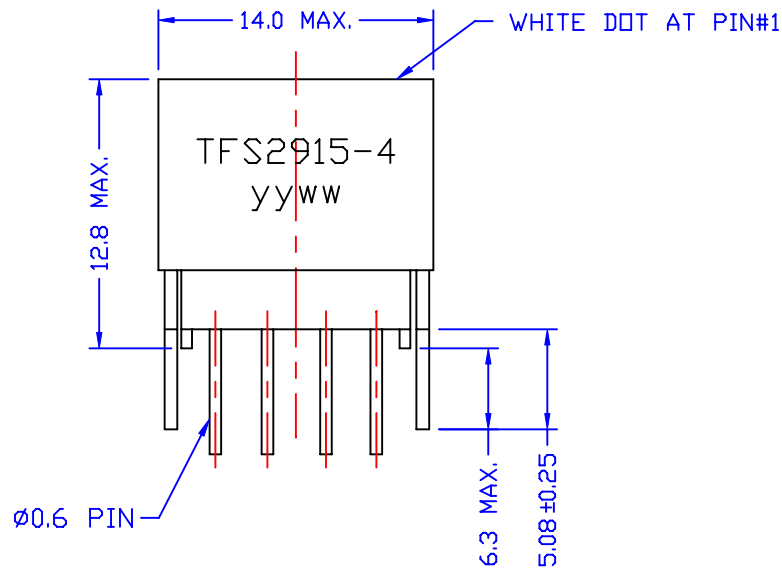

ELECTRICAL CHARACTERISTICS :

(FOR MITEL MT8978, MH89780, MT8979, MH89791, E1 INTERFACE)

- D.C.R. : PIN 4-8 = 0.11 OHM ± 15%
PIN 1-5 = 2-6 = 1.8 OHM ± 15%
- INDUCTANCE (@10KHZ, 1Vrms) : PIN 4-8 = 810uH +30% -20%
- Q VALUE (@10KHZ, 0.1Vrms) : PIN 4-8 = 20 MIN.
- WINDING CAPACITANCE (@10KHZ, 0.1Vrms) : PIN 1-2 = 100pF MAX.
PIN 1-4 = 15pF MAX.
- LEAKAGE (@10KHZ, 0.1Vrms, W/H PIN 1-2-5-6 SHORT) :
PIN 4-8 = 1.8uH MAX
- TURN RATIO : PIN 1-5 : 4-8 = 1.95
PIN 1-5 : 4-7 = 2.5
PIN 1-5 : 2-6 = 1
- HI-POT (@1500VAC, 1mA, 1MINUTE) : PRI-SEC-CORE

						Atech®		TITLE	CEPT OUTPUT
						Atech Technology Co. Ltd.		TRANSFORMER	
						TEL:022794-6667 FAX:022794-8004		DWG. NO.	
								TFS2915-4	
RELEASE		05/06/2005	BART	AL	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	
NO		DESCRIPTION	DATE	BY	CHK	APPD	P/N:	DRAW	
REVISIONS						05/06/05	CTS410001A	Pair	