
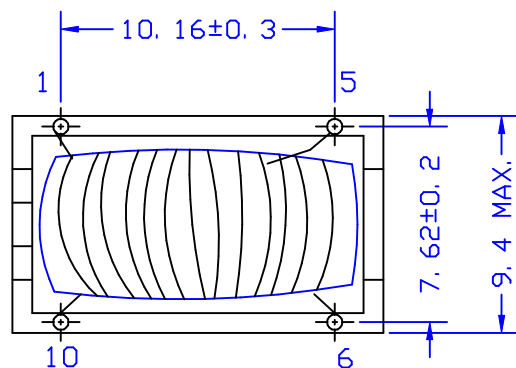



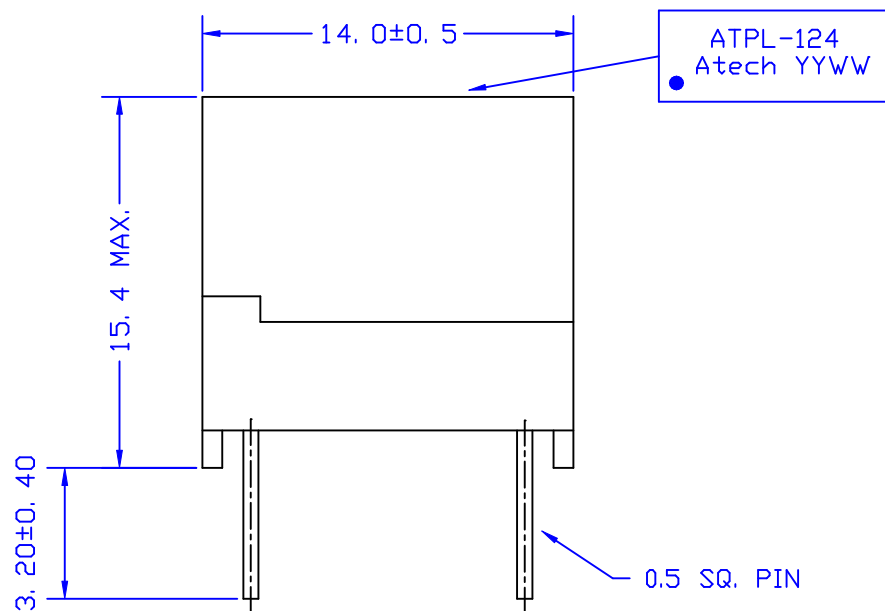

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-10 = 5-6 = 2 OHM+/-12%
2. INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-10 = 5-6 = 70mH+50%-30%
3. LEAKAGE INDUCTANCE (@10KHZ, 0.1Vrms, W/H 5-6 SHORT) :
PIN 1-10 = 1uH MAX.
4. TURNS RATIO (@10KHZ, 0.1Vrms) : PIN 1-10 : 5-6 = 1+/-1%
5. HI-POT: (@500VAC, 1mA, 2SEC) PIN 1-5
6. RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ISDN COMMON CHOKE	
							DWG. NO. ATPL-124R	
	RELEASE	03/31/2006	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 03/31/06	P/N: CTSG11001A	DRAW <i>Pair</i>
REVISIONS								