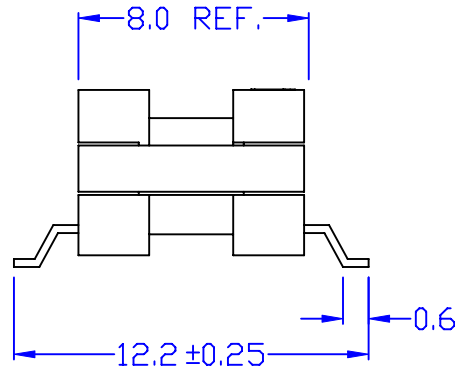
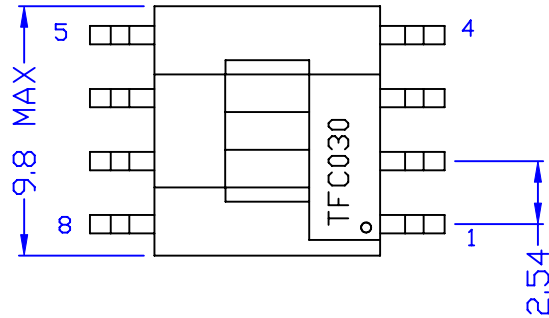
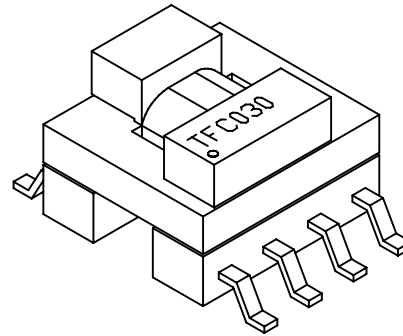


ELECTRICAL SPECIFICATION :

1. D.C.R : 3-5 = 0.055 Ω HM MAX. 5-4 = 0.06 Ω HM MAX.
1-8 = 0.4 Ω HM MAX. 8-2 = 0.44 Ω HM MAX.
2-7 = 0.48 Ω HM MAX.
2. L : (<@100KHZ,100mV>) 3-4 = 3.02 μ H+/-10%
3. LEAKAGE INDUCTANCE : (<@100KHZ, 100mV>)3-4 = 0.19 μ H MAX.(1,2,7,8 SHORT)
4. TURN RATIO(<@100KHZ, 100mV>) 1-8 : 2-7 = 1.07+/-7%
1-8 : 8-2 = 1.07+/-7%
1-8 : 3-5 = 2.8+/-7%
1-8 : 5-4 = 2.8+/-7%
5. HI-POT<@500 VAC, 1mA 2S>1-4
6. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE TRANSFORMER	
B	PIN DIM	10/11/2006	PAIR	VINCENT	EUGENE		DWG. NO.	
A	DIM 9.8 MAX.	08/23/2006	PAIR	VINCENT	EUGENE		TFC030R	
	RELEASE	05/26/2006	PAIR	VINCENT	EUGENE			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
						DATE	P/N:	DRAW
REVISIONS						05/26/06	CTW008000A	<i>Pair</i>